ASSISTANT COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, DC 20231

PATENT
Date: April 7, 1999
File No. 0941.63012

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Akira Yamamoto, Kazuhiro Takahara, Hiroshi Murakami

For: LIQUID CRYSTAL DISPLAY DEVICE

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

04/07/99
Date

Express Mail Label No.:EM045520142US

Enclosed are:

(X) 25 pages of specification, including 13 claims and an abstract.
(X) an executed oath or declaration, with power of attorney.
( ) an unexecuted oath or declaration, with power of attorney.
( ) _____ sheet(s) of informal drawing(s).
(X) 20 sheet(s) of formal drawings(s).
(X) Assignment(s) of the invention to FUJITSU LIMITED.
(X) Assignment Form Cover Sheet.
(X) A check in the amount of $ 40.00 to cover the fee for recording the assignment(s) is enclosed.
(X) Information Disclosure Statement.
(X) Form PTO-1449 and cited references.
( ) Associate power of attorney.
(X) Priority Document.

Fee Calculation For Claims As Filed

a)	Basic Fee							$ 760.00
b)	Independent Claims	1	- 3 =	0	x	$ 78.00	=	$_____
c)	Total Claims	13	- 20 =	0	x	$ 18.00	=	$_____
d)	Fee for Multiple Claims					$260.00	=	$_____
						Total Filing Fee		$ 760.00

( ) ____ Statement(s) of Status as Small Entity, reducing Filing Fee by half to $_____

(X) A check in the amount of $ 760.00 to cover the filing fee is enclosed.

( ) Charge $_____ to Deposit Account No. 07-2069.

( ) Other _____.

(X) The Commissioner is hereby authorized to charge any additional fees which may be required to this application under 37 C.F.R. §§1.16-1.17, or credit any overpayment, to Deposit Account No. 07-2069. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 07-2069. A duplicate copy of this sheet is enclosed.

Suite 8660 - Sears Tower
233 S. Wacker Drive
Chicago, Illinois 60606
(312) 993-0080

GREER, BURNS & CRAIN, LTD.

By: _____
Patrick G. Burns
Registration No. 29,367

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

04/07/99
Date

Express Mail Label No.:
EM045520142US

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT WE, Akira Yamamoto, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Kazuhiro Takahara, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan and Hiroshi Murakami, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

LIQUID CRYSTAL DISPLAY DEVICE

of which the following is a specification : -

TITLE OF THE INVENTION

LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to a liquid crystal display device, and more particularly to a liquid crystal display device having a panel of a peripheral circuit integrated type on which a peripheral circuit and a liquid crystal display part are integrally formed on a base.

2. Description of the Related Art

A liquid crystal display panel is as small as a few inches and a relatively small delay of time due to the resistances of interconnection lines.

Fig. 1 shows a conventional liquid crystal display device, which includes a substrate 10, a data driver 12, a gate driver 14 and a liquid crystal panel 16.

The data driver 12 includes a shift register 18, display signal lines 30, a plurality of 24-bit data buses (eight sets of R, G and B lines) 22, a level shifter 24, and an analog switch unit 28. A group 26 of control signals are applied to the level shifter 24. More particularly, the control signals are a start signal DS1 and two clock signals DCLK1 and DCLK2 externally applied to the shift register 18 via the level shifter 24. In response to the start signal DS1, the shift register 18 starts to operate, and opens or close analog switches of the analog switch unit 28 by using the clock signals DCLK1 and DCLK2. Display signals R1, G1, B1, ..., R24, G24 and B24 transferred over the 24 display signal lines 30 are applied to the liquid crystal panel 16 via the data buses 22.

The gate driver 14 is made up of a shift register 32, a buffer 34 and a level shifter 36.

The shift register 32 receives a group 40 of control signals, which are a start signal GS1, and two clock signals GCLK1 and GCLK2 externally applied to the shift register 32 via the level shifter 36. In response to the start signal GS1, the shift register 32 starts to operate, and output drive signals which serially specify data take-in positions by using the clock signals GCLK1 and GCLK2. The drive signals are then applied to the liquid crystal panel 16 via the buffer 34.

As shown in Fig. 2, the liquid crystal panel 16 is scanned from the left-hand side to the right-hand side. More particularly, the analog switches of the unit 28 connected to the leftmost 24-bit data bus 22 are closed, and the display data R1 - B8 are written onto the leftmost 24-bit data bus 22. Then, the neighboring 24-bit data bus 22 is selected by closing the associated analog switches of the unit 28, and is supplied to the display data. The above operation is repeatedly carried out 100 times.

When the display data amounting to the first scanning line of the panel 16 extending from the shift register 32 has been sent thereto, the above display data is written onto the first scanning line. Thereafter, the display data is written into the 2400 data bus lines as described above, and the shift register 32 drives the second scanning line. In the above manner, the display data is written into the whole panel 16.

The display data are supplied to the 24-bit data buses 22 one by one at the different timings. This method is called dot-sequential driving method. When the number of pixels of the panel 16 is equal to 800 x RGB x 60 dots, the frequency of the control signals 26 is equal to 40 MHz. By dividing the frequency of 40 MHz by the

number of 24-bit data buses 22, each of the 24-bit data buses 22 is assigned 5 MHz (200 ns). It is thus required to complete the writing of display data onto the 24 bus lines (24 bits equal to 8 x RGB) within only 200 ns. Generally, when a compact panel has a size of a few inches and each line of the 24-bit data buses 22 is made of aluminum, the bus line has a resistance of a few kilo-ohms and a capacitance of 10 pF. If each line of the 24-bit data buses 22 has a resistance of 3 kΩ, the time constant of the bus lines is equal to 3 kΩ x 10 pF = 30 ns. Hence, if it is required to provide a charging time as long as five times the time constant of the bus 20 in order to settle the 24-bit data bus 22 with a sufficient margin, it is enough to write the display data onto the 24-bit data bus 22 for about 150 ns. Hence, there is no problem.

However, when the panel 16 has a large size of 10 inches or more, each line of the 24-bit data buses 22 has a resistance of 10 kΩ or more. Additionally, the resistance of the display signal lines 30 cannot be neglected. The resistance of the display signal lines 30 can be reduced if an increased number of lines 30 is used, as shown in Fig. 3. The structure shown in Fig. 3 employs 300 display signal lines to which display signals D1 - D300 are respectively applied. The display signal lines 42 can be driven by a general-purpose data driver IC marketed. An increased number of display signal lines is used, the display data can be written onto the data buses 22 for a longer time. Hence, the width of each of the display signal lines 42 can be reduced. However, the total width of the display signal lines 42 is approximately equal to 6.0 mm. This increases the size of the peripheral circuits with regard to the panel 16.

It may be possible to use an intermediate

number of display signal lines (for example, 100 lines) in order to reduce the size of the peripheral circuits formed on the substrate 10. The intermediate number of display signal lines is driven by the general-purpose data driver IC. As the number of display signal line is reduced, the available write time is reduced. Hence, it is required to increase the width of each of the display signal lines. However, as the width of each of the display signal lines is increased, the cross coupling capacitance formed between each display signal line and the associated data bus line is increased. For example, if each of the display signal lines is 90 μm wide and each of the data bus lines 22 is 5 μm wide, the cross coupling capacitance is as large as 150 pF. Since the general-purpose data driver IC has a driving capability of approximately tens of pF, it cannot drive the 100 display signal lines.

It can be seen from the above that it is required to reduce the cross coupling capacitance and the area on the substrate 10 occupied by the display signal lines. Unless the above requirements are satisfied, the liquid crystal display device of a large size does not have satisfactory performance.

SUMMARY OF THE INVENTION

It is a general object of the present invention to provide a liquid crystal display device in which the above disadvantages are eliminated.

The above object of the present invention is achieved by a liquid crystal display device comprising: a liquid crystal display panel; a data driver connected to the liquid crystal display panel; and a gate driver connected to the liquid crystal display panel. The data driver being divided into a plurality of blocks, which

simultaneously supply the liquid crystal display panel with display signals respectively supplied thereto. Hence, each of the blocks has a reduced number of display signal lines, which reduces an area for arranging the display signal lines. Hence, the cross-coupling capacitance can be reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings, in which:

Fig. 1 is a block diagram of a conventional liquid crystal display device of a dot sequential type;

Fig. 2 shows a method of writing display signals in the conventional device shown in Fig. 1;

Fig. 3 is a block diagram of a variation of the device shown in Fig. 1;

Fig. 4 is a block diagram of an outline of a liquid crystal display device according to a first embodiment of the present invention;

Fig. 5 shows a method of writing display signals in the device shown in Fig. 4;

Fig. 6 is a block diagram of a liquid crystal display device according to a first embodiment of the present invention;

Fig. 7 is a diagram of a block 72A shown in Fig. 6;

Fig. 8 is a block diagram of a driver IC device shown in Fig. 6;

Fig. 9 is a block diagram of a display signal supply device used in the first embodiment of the present invention;

Fig. 10 is a timing chart of an operation of the display signal supply device shown in Fig. 9

and an operation of the driver IC device shown in Fig. 6;

Fig. 11 is a diagram of an overall structure of the liquid crystal display device;

Fig. 12 is a block diagram of a structure of the display signal supply device shown in Fig. 12;

Fig. 13 is a block diagram of a liquid crystal display device according to a second embodiment of the present invention;

Fig. 14 is a block diagram of a display signal supply device used in the second embodiment of the present invention;

Fig. 15 is a timing chart of an operation of the display signal supply device shown in Fig. 14;

Fig. 16 is a block diagram of a liquid crystal display device according to a third embodiment of the present invention;

Fig. 17 is a block diagram of a liquid crystal display device according to a fourth embodiment of the present invention;

Fig. 18 is a circuit diagram of a digital eight-bit latch circuit shown in Fig. 8;

Fig. 19 is a circuit diagram of an eight-bit D/A converter shown in Fig. 8; and

Fig. 20 is a cross-sectional view of a polysilicon transistor used to form a pixel on the liquid crystal display panel.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 4 is a block diagram of an outline of a liquid crystal display device according to the present invention. In Fig. 4, parts that are the same as those shown in the previously described figures are given the same reference numbers.

In the structure shown in Fig. 4, the data

driver 12 is divided into four blocks 46A, 46B, 46C and 46D, which respectively have 75 display signal lines 64A, 64B, 64C and 64D, and shift registers 48A, 48B, 48C and 48D, and analog switch units 66, which components are integrally formed on the substrate 10. Hence, each of the blocks 46A - 46D requires an area having a reduced width of, for example, 1.5 mm for the 75 display signal lines. Each of the analog switch units 66 has 600 analog switches, which are corrected to corresponding data bus lines of a 75-bit data bus so that a plurality of analog switches are connected to one display signal line.

Fig. 5 shows a method of writing display signals (D1 - D75) 62 into the display panel 16. The blocks 46A - 46D simultaneously receive the respective display signals having display signals D1 - D75, and simultaneously perform the write operation thereon. In each of the blocks 46A - 46D, the display signals D0 - data D75 are simultaneously written into the 75 signal lines at once. The panel 16 has 2400 data bus lines, and thus each of the blocks 46A - 46D is connected to respective 600 data bus lines. Hence, the write operation is repeated eight times in each of the blocks 46A - 46D. That is, the number of write times in the present invention is one fourth of that of the prior art.

A description will now be given of a first embodiment of the present invention with reference to Fig. 6, in which parts that are the same as those shown in the previously described figures are given the same reference numbers. The display signal 62 is supplied from a driver IC device 76, which is called a TAB(Tape Automated Bonding) IC device.

A data driver 70 includes four blocks 72A - 72D, which respectively have shift registers 48A - 48D, level shifter 50A - 50D, groups 75A - 75D of display signal lines extending from the driver IC

device 76, and the analog switch units 66 each having 600 analog switches. The driver IC device 76 is supplied with a display signal supplied from a display signal supply device 114, which will be described in detail with reference to Figs. 11 and 12.

Fig. 7 shows a structure of the block 72A. The display signals D1 - D75 are supplied to the display signal lines 74A from the corresponding output terminals of the driver IC device 76. The start signal DS1 and the clock signals DCLK1 and DCLK2 are applied to the shift register 48A via a level shifter 50A of the block 72A. These control signals are commonly applied to the other blocks 72B - 72D. Then, the shift register 48A operates a shift operation. The 75 analog switches of the analog switch unit 66 associated with input terminals R1 - B25 of the panel 16 are simultaneously turned on, and the display signals D1 - D75 are supplied to the panel 16 over a 75-bit data bus 68A via the analog switches. At this time, each of the other blocks 72B, 72C and 72D is supplied with the respective display signal having signals D1 - D75. Further, the first 75 analog switches in each of the blocks 72B - 72D are turned on by the respective shift registers 48B, 48C and 48D. Thus, the display signals D1 - D75 in each of the blocks 72B, 72C and 72D are simultaneously written into the panel 16. Hence, 300 bits of display data are simultaneously written into the panel 16. During the above write operation, the first scanning line is driven by the shift register 32 via the buffer 34.

Then, the next display signals D1 - D75 are supplied to the blocks 72A - 72D, while the shift registers 48A - 48D shifts the start pulses applied thereto by one step. Hence, the next 75

analog switches are selected in each of the blocks 72A - 72D, and the display signals D1 - D75 are written into the panel simultaneously.

The above operation is repeated eight times so that the 2400 bits of the display signal are written into the pixels of the panel 16 related to the first scanning line.

Fig. 8 is a block diagram of the driver IC device 76. As shown in Fig. 8, the driver IC device 76 includes a shift register 80, eight-bit digital latch circuits 88, eight-bit digital latch circuits 92, and D/A (Digital-to-Analog) converters 94. The shift register 80 shifts a start pulse SP in synchronism with a clock signal CLK. Each of pulse signals by shifting the start pulse is applied to a respective group of three eight-bit digital latch circuits 88.

Eight-bit signals 86A, 86B and 86C are applied to the respective eight-bit digital latch circuits of the same group from the display signal supply device 114. The signal 86A consists of eight bits of display data R. The signal 86B consists of eight bits of display data B. The signal 86C consists of eight bits of display data C. The three latch circuits 88 of the same group are supplied with the shift pulse from the shift register 80 and simultaneously latch the eight-bit signals 86A - 86C, respectively. Then, the next three latch circuits 88 of the same group are supplied with the shift pulse from the shift register 80 and simultaneously the eight-bit signals 86A - 86C, respectively. In the above manner, the digital eight-bit latch circuits 88 are sequentially selected every three ones. When all the 300 latch circuits 88 have latched the corresponding eight-bit digital signals, a latch enable signal LE is applied to the digital eight-bit latch circuits 92, which simultaneously

latch the eight-bit display signals from the corresponding latch circuits 88.

Then, the digital eight-bit signals are output from the latch circuits 92 and are converted into analog signals by the D/A converters 94. Hence, 300 display signals R1 - B100 are output from the driver IC derive 76. The first, second, third and fourth 75 display signals are respectively supplied, as the display signals D1 - D75, to the shift registers 48A, 48B, 48C and 48D of the blocks 72A, 72B, 72C and 72D.

Fig. 9 shows a structure of the display signal supply device 114. With regard to a red signal externally supplied, the display signal supply device 114 includes input switches war1, wbr1, wcr1 and wdr1, a group 100 of four FIFO memories, and output switches rar1, rbr1, rcr1 and rdr1. The output terminals of the switches are connected together, via which the display signal 86A is output. With regard to a green signal externally supplied, the display signal supply device 114 includes input switches wag1, wbg1, wcg1 and wdg1, a group 101 of four FIFO memories, and output switches rag1, rbg1, rcg1 and rdg1. The output terminals of the switches are connected together, and the display signal 86B is output via these terminals. With regard to a blue signal supplied, the display signal supply device 114 includes input switches wab1, wbb1, wcb1 and wdb1, a group 102 of FIFO memories, and output switches rab1, rbb1, rcb1 and rdb1. The output terminals of the switches are connected together, and the display signal 86C is output via these output terminals.

The group 100 of FIFO memories handles 800 bits R1 - R800 of the read signal. Similarly, the group 101 of FIFO memories handles 800 bits G1 - G800 of the green signal, and the group 102 of FIFO

memories handles 800 bits B1 - B800 of the blue signal. Each of the group 100 of FIFO memories has 200 bits. That is, the four FIFO memories of the group 100 handle R1 - R200, R201 - R400, R401 - R600 and R601 - R800. The other groups 101 and 102 are configured in the same manner as the group 100.

Fig. 10 is a timing chart of an operation of the display signal supply device 114. Display data equal to one horizontal period is divided into four blocks. Since one horizontal period includes 800 pixels, display data are written into the groups of FIFO memories every 200 bits. A horizontal synchronizing signal HSYNC applied to the display signal supply device 114 resets all the FIFO memories shown in Fig. 9, which operate in synchronism with the clock signal CLK externally supplied thereto.

A select signal wa having a period equal to 200 pixels or bits is applied to the switches war1, wag1 and wab1 of the groups 100, 101 and 102. Hence, display data R0 - R200, G1 - G200 and B1 - B200 are respectively written into the first FIFO memories of the groups 100, 101 and 102. Next, a select signal wb having a period equal to 200 bits is applied to the switches wbr1, wbg1 and wbb1. Hence, display data R201 - R400, G201 - G400 and B201 - B400 are respectively written into the second FIFO memories of the groups 100, 101 and 102. Then, a select signal wc having a period equal to 200 bits is applied to the switches wcr1, wcg1 and wcb1. Hence, display data R401 - R600, G401 - G600 and B401 - B600 are respectively written into the third FIFO memories of the groups 100, 101 and 102. Finally, a select signal wd having a period equal to 200 bits is applied to the switches wdr1, wdg1 and wdb1. Hence, display data R601 - R800, G601 - G800 and B601 - B800 are respectively written into the

fourth FIFO memories of the groups 100, 101 and 102.

The display data R0 - R800, G0 - G800 and B0 - B800 are read from the FIFO memories via the output switches controlled by select signals ra, rb, rc and rd which are serially activated at different timings in this order. The first select signal ra is activated in response to the start pulse SP. The select signal ra having a period equal to 25 bits is applied to the output switches rar1, rag1 and rab1 twice while the select signal wa equal to 200 bits is active. Similarly, each of the select signals wb, wc and wd is applied to the corresponding output switches twice during the period of the select signal wa.

For example, each time the select signal ra is applied to the output switches rar1, rag1 and rab1, 25 bits of the red signal, 25 bits of the green signal, and 25 bits of the blue signal are output to the driver IC device 76 from the groups 100, 101 and 102. These 25-bit red, green and blue signals are the signals stored in the FIFO memories in the previous cycle.

Similarly, the select signals rb, rc and rd are serially applied and corresponding red, green and blue signals are read from the FIFO memories. Hence, when the select signals ra, rb, rc and rd are respectively applied once, 300 bits of display data are supplied to the driver IC device 76, and are written into the digital eight-bit latch circuits 88 shown in Fig. 8.

After the select signal rd is applied, the latch enable signal LE is activated, and the 300 bits of display data latched in the circuit 88 are latched in the digital eight-bit latch circuits 92 shown in Fig. 8. When the latch enable signal LE is high and active, all the output select signals ra - rd are low and is thus inactive. This is intended

to satisfy that the general driver IC device 76 is required to inhibit the device 76 from latching next data for a given time equal to, for example, 5 clocks while the previous data is output.

As shown in Fig. 11, the driver IC device 76 and the display signal supply device 114 are connected by a flexible cable 112 having a plurality of interconnection lines 112a. A reference number 119 indicates the liquid crystal display device, which is supplied with a vertical synchronizing signal VSYNC in addition to the aforementioned digital display signals R, G and B and the horizontal synchronizing signal HSYNC.

Fig. 12 is a block diagram of the display signal supply device 114. As shown in Fig. 12, the display signal supply device 114 includes a display signal supply circuit 115 and a timing circuit 116. The timing circuit 116 generates, from the horizontal and vertical synchronizing signals 117 externally supplied, the select signals applied to the input and output switches of the circuit 115 shown in Fig. 9, the start signals SP, DS1 and GS1, and the clock signals CLK, DCLK1, DCLK2, GCLK1 and GCLK2, and the latch enable signal LE. These signals are transferred to the driver IC device 76 via the flexible cable 112.

Fig. 13 is a block diagram of a liquid crystal display device according to a second embodiment of the present invention. In Fig. 13, parts that are the same as those shown in the previously described figures are given the same reference numbers. The liquid crystal display device shown in Fig. 13 employs two driver IC devices 124 and 126.

The data driver of the device shown in Fig. 13 is divided into four blocks 122A - 122D, as in the case of the first embodiment of the present

invention. The four blocks 122A - 122D are the same as the four blocks 72A - 72D shown in Fig. 6 although the positions of some circuits are different from those shown in Fig. 6.

The driver IC device 124 is supplied with display data equal to two blocks from a display data supply device 114A (which will be described later), and the driver IC device 126 is supplied with display data equal to two blocks therefrom. The driver IC device 124 supplies the display signals D1 - D75 to the display signal lines 74A and the display signals D1 - D75 to the display signal lines 74B. Similarly, the driver IC device 126 supplies display signals D1 - D75 to the display signal lines 74C and the display signals D1 - D75 to the display signal lines 74D. Then, the blocks 122A - 122D operate in the same manner as the blocks 72A - 72D.

Fig. 14 is a block diagram of the display data supply circuit 114A to which the two driver IC devices 124 and 126 are connected. The display data supply circuit 114A has the same input and output switches and the FIFO memories as those of the circuit 114. However, the output terminals of the output switches are connected in a different manner as that of those in the circuit 114. More particularly, the output terminals of the output switches rar1 and rbr1 are connected together and to the driver IC device 124, and the output terminals of the output switches rcr1 and rdr1 are connected together and to the driver IC device 126. The output terminals of the output switches rag1 and rbg1 are connected together and to the driver IC device 124, and the output terminals of the output switches rcg1 and rdg1 are connected together and to the driver IC device 126. The output terminals of the output switches rab1 and rbb1 are connected together and to the driver IC device 124. The

output terminals of the output switches rcb1 and rdb1 are connected together and to the driver IC device 126.

Fig. 15 is a timing chart of an operation of the display signal supply device 114A shown in Fig. 14. As shown in Fig. 15, the input switches war1, wbr1, wcr1 and wdr1, wag1, wbg1, wcg1 and wdg1, and wab1, wbb1, wcb1 and wdb1 are controlled in the same manner as those of the display signal supply device 114. In contrast, the output switches of the device 114A are controlled in a way different from that for the output switches of the device 114. More particularly, the select signals ra and rc are simultaneously activated and are applied to the corresponding output switches. Hence, R1 - R25, G1 - G25 and B1 - B25 are supplied to the driver IC device 124, and simultaneously R401 - R425, G401 - G425 and B401 - B425 are supplied to the driver IC device 126. Then, the select signals rb and rd are simultaneously activated and are applied to the corresponding output switches. Hence, R201 - R225, G201 - G225 and B201 - B225 are supplied to the driver IC device 124, and simultaneously R601 - R625, G601 - G625 and B601 - B625 are supplied to the driver IC device 126. Then, the latch enable signal LE is activated, so that R1 - R25, G1 - G25 and B1 - B25 and R201 - R225, G201 - G225 and B201 - B225 are output from the driver IC device 124, and simultaneously R401 - R425, G401 - G425 and B401 - B425 are output from the driver IC device 126. That is, the 300 display signals in total are applied to the panel 16.

The above-mentioned operation is repeated eight times as shown in Fig. 15, so that the 2400 display signals (300 x 8) are supplied to the panel during one horizontal period and are displayed.

In Fig. 13, the display signal lines 74A

and 74B extend from the driver IC device 124 straight and pass through an interface area between the adjacent blocks 122A and 122B. Similarly, the display signal lines 74C and 74D extend from the driver IC device 126 straight and pass through an interface area between the adjacent blocks 122C and 122D. Hence, as compared to the arrangement shown in Fig. 6, the area for routing and arranging the display signal lines can be reduced by, for example, 1.5 mm. In addition, the lengths of the display signal lines extending from the driver IC device can be reduced.

Fig. 16 shows a liquid crystal display device according to a third embodiment of the present invention, in which parts that are the same as those in the previously described figures are given the same reference numbers. The device shown in Fig. 16 does not use any driver IC devices but uses an on-panel digital driver 134 that is formed on the panel 16.

The device shown in Fig. 16 has a data driver 121, which is divided into four blocks 122A - 122D, which are connected to the on-panel digital driver 134. The digital driver 134 corresponds to the combination of the driver IC devices 124 and 126. That is, the digital driver 134 operates as shown in Fig. 15.

According to the third embodiment of the present invention, the peripheral circuits of the panel 16 including the on-panel digital driver 134 are formed on the panel, so that the number of connecting points can be reduced and down sizing of the device can be facilitated.

Fig. 17 shows a liquid crystal display device according to a fourth embodiment of the present invention, which has four blocks 170A - 170D, which have six display signal lines 166A, 166B, 166C

and 166D. In Fig. 17, parts that are the same as those shown in the previously described figures are given the same reference numbers.

The blocks 170A - 170D respectively have shift registers 48A - 48D, the level shifters 50A - 50D, the display signal lines 166A - 166D and the analog switches 164, which switches are connected to the display panel 16. The shift registers 48A - 48B can be supplied with the display signals from one or a plurality of driver IC devices or the on-panel digital driver. The first through third embodiments of the present invention have the display signal lines provided to the respective display signals. In contrast, according to the fourth embodiment of the present invention, each of the six display signal lines is shared by a plurality of display signals in order to reduce the number of display signal lines.

In operation, 24 pieces of display data (6 display digital lines x 4 blocks) are supplied to the driver IC device or the on-panel digital driver. For example, display data directed to the block 170A are "R1G1B1R2G2B2". Then, in response to the latch enable signal LE (an illustration thereof is omitted in Fig 17), every six ones of the 24 display signals 162 are simultaneously supplied to the respective one of the display signal lines 166A - 166D of the respective blocks 170A - 170D. For example, the six display signal lines 166A of the block 170A are supplied with the display signals R1, G1, B1, R2, G2, and B2. Then, the first six analog switches 164 are turned on, and the above display signals are supplied to the panel 16.

Similarly, every six one of the next 24 display signals subsequent to the first 24 display signals are supplied from the driver IC device or the on-panel digital driver to the respective one of

the display signal lines 166A - 166D. For example, the six display lines 166A of the block 170A are supplied with the display signals R3, G3, B3, R4, G4 and B4. In this manner, the 100 display signals are written onto one display line in each of the blocks 170A - 170D. Hence, the blocks 170A - 170D operate in synchronism with each other, and the 600 display signals are supplied to the panel in each of the blocks 170A - 170D. Thus, the shift registers 48A - 48D can commonly use the start pulse DS1 and the clock signals DCLK1 and DCLK2.

The fourth embodiment of the present invention uses only six display signal lines, and can be miniaturized. For example, the width of an area for accommodating the six display signal lines 166A can be reduced to approximately 0.6 mm.

Fig. 18 is a circuit diagram of one of the eight-bit latch circuits 92 used in the configuration shown in Fig. 8. The eight-bit latch circuits 88 also used in the configuration shown in Fig. 8 are configured in the same manner as the circuits 92. The eight-bit latch circuit shown in Fig. 18 includes gate switches 136, capacitors 137, and two-stage inverter circuits 138. The gates of the gate switches 136 are supplied with the latch enable signal LE. Each of the capacitors 137 is charged when the corresponding input signal is high and the corresponding gate switch 136 is ON. The inverters 138 of the first stage are controlled by the states of the corresponding capacitors 137. Hence, a power supply voltage VDD or ground voltage is output via the respective output terminals of the eight-bit latch circuit 92 in accordance with the corresponding input signals. In the eight-bit latch circuits 88, the latch enable signal LE is supplied from the shift register 80 shown in Fig. 8.

Fig. 18 is a circuit diagram of each of

the D/A converters 94, which converts the eight-bit digital signal into a corresponding analog signal. The D/A converter 94 includes transistors 140 - 140 which implement resistors of different resistance values, and gate transistors 150 - 157. The transistors 140 - 147 have different channel widths W0 - W7, which realize the different resistance values. For example, the channel width W0 is the shortest, and the channel width W7 is the longest. The drains of the transistors 140 - 147 are supplied with the power supply voltage VDD. The gates of the transistors 140 - 147 are supplied with a high-level bias signal, so that all the transistors 140 - 147 are ON. The sources of the transistors 140 - 147 are connected to the drains of the transistors 150 - 157. The gates of the transistors 150 - 157 are supplied with the respective bits of the eight-bit digital input signal, and the sources thereof are grounded via a resistor R and are connected to an output terminal 160. The current flowing in the resistor R depends on which transistors are turned on in response to the eight-bit digital input signal. The voltage of the end of the resistor R1 depends on the magnitude of the current flowing in the resistor R.

Fig. 20 is a cross-sectional view of the display panel 16 and shows one pixel formed thereon. A polysilicon layer 182 serving as an active layer is formed on a glass substrate 180. An SiO_2 layer 184 is formed on the polysilicon layer 182 as a gate insulating film. A polysilicon layer 186 is formed on the SiO_2 layer 184. An insulating layer 188 is provided by a reflow process, and contact holes 196 and 198 are formed in the insulating layer 188 by a photolithography and dry etching process. Then, polysilicon doped with phosphorus or the like is deposited and patterned into a source electrode 192

and a drain electrode 194. Then, an insulating film 200 is subjected to a reflow process so that a protection film is formed. A polysilicon transistor thus formed can be applied to all transistors formed on the panel 16. For example, the data drivers can be formed by polysilicon transistors.

The present invention is not limited to the specifically disclosed embodiments, and variations and modifications may be made without departing from the scope of the present invention.

WHAT IS CLAIMED IS:

1. A liquid crystal display device comprising:

a liquid crystal display panel;

a data driver connected to the liquid crystal display panel; and

a gate driver connected to the liquid crystal display panel,

the data driver being divided into a plurality of blocks, which simultaneously supply the liquid crystal display panel with display signals respectively supplied thereto.

2. The liquid crystal display device as claimed in claim 1, wherein each of the blocks comprises:

a shift register;

signal lines to which the display signals are supplied;

data bus lines connected to the signal lines and the liquid crystal display panel; and

analog switches provided in the data bus lines and controlled by an output signal of the shift register.

3. The liquid crystal display device as claimed in claim 1, further comprising a driver

device which receives display data externally supplied and outputs the display signals derived therefrom to the blocks of the data driver.

4. The liquid crystal display device as claimed in claim 1, further comprising a plurality of driver devices which are respectively associated with a plurality of ones of the blocks, each of the plurality of driver devices receiving display data externally supplied and outputting the display signals derived therefrom to associated blocks of the data driver.

5. The liquid crystal display device as claimed in claim 4, wherein the display signal lines of the associated blocks have parts extending from one of the plurality of driver devices through a space located between the associated blocks.

6. The liquid crystal display device as claimed in claim 1, further comprising a substrate on which said liquid crystal display panel, said data driver, and said gate driver are integrally formed.

7. The liquid crystal display device as claimed in claim 1, wherein said data driver comprises polysilicon transistors.

8. The liquid crystal display device as claimed in claim 3, further comprising a display signal supply device which outputs the display data to the driver device.

9. The liquid crystal display device as claimed in claim 8, wherein the display signal display device is formed on the liquid crystal display panel.

10. The liquid crystal display device as claimed in claim 4, further comprising a display signal supply device which outputs the display data to the plurality of driver devices.

11. The liquid crystal display device as claimed in claim 1, wherein each of the plurality of blocks supplies the liquid crystal display panel with a given number of display signals at once.

12. The liquid crystal display device as claimed in claim 3, wherein said driver device comprises a shift register which outputs a shift signal, first latch circuits which latches the display data in response to the shift signal, and second latch circuits which latches the display data from the first latch circuits in response to a latch enable signal externally supplied.

13. The liquid crystal display device as claimed in claim 12, further comprising digital-to-analog converters which convert the display data from the second latch circuits into analog signals.

ABSTRACT OF THE DISCLOSURE

A liquid crystal display device includes a liquid crystal display panel, a data driver connected to the liquid crystal display panel, and a gate driver connected to the liquid crystal display panel. The data driver is divided into a plurality of blocks, which simultaneously supply the liquid crystal display panel with display signals respectively supplied thereto.

FIG. 1

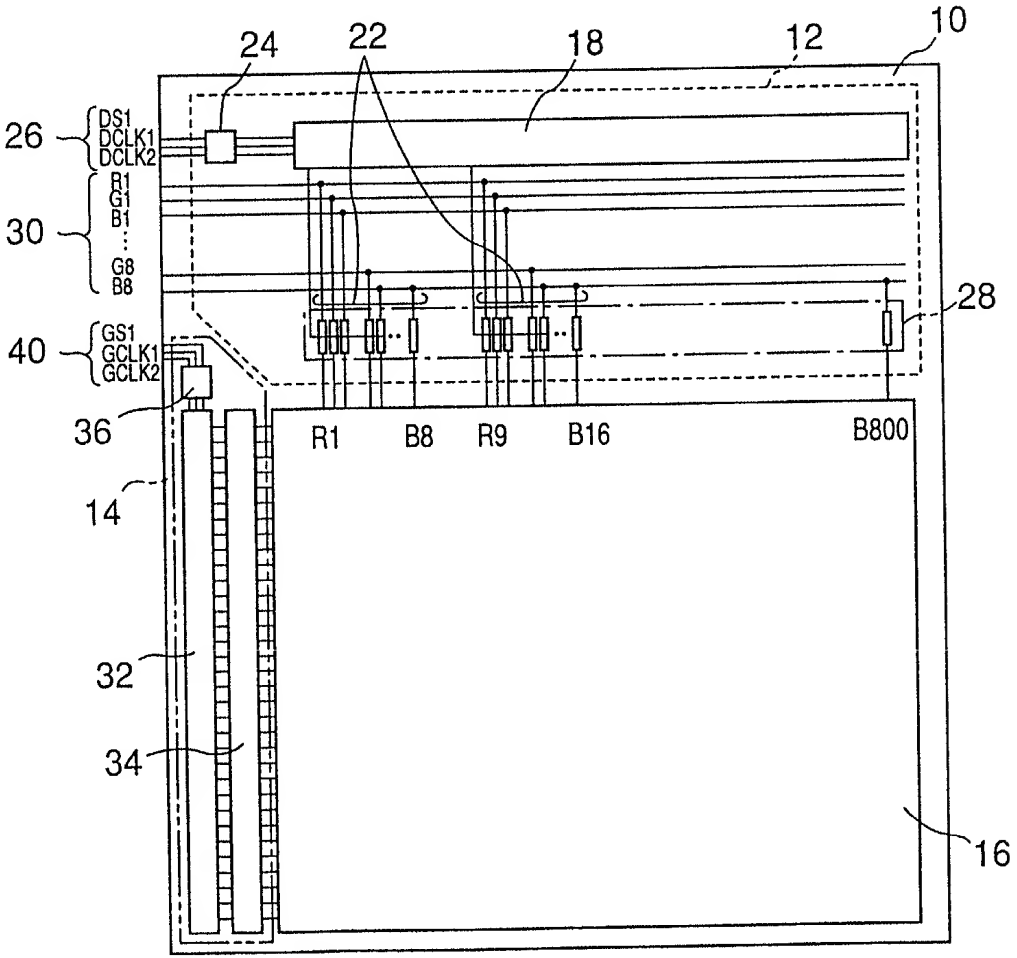
24
22
18
12
10
26
DS1
DCLK1
DCLK2
30
R1
G1
B1
G8
B8
28
40
GS1
GCLK1
GCLK2
36
R1
B8
R9
B16
B800
14
32
34
16

FIG. 2

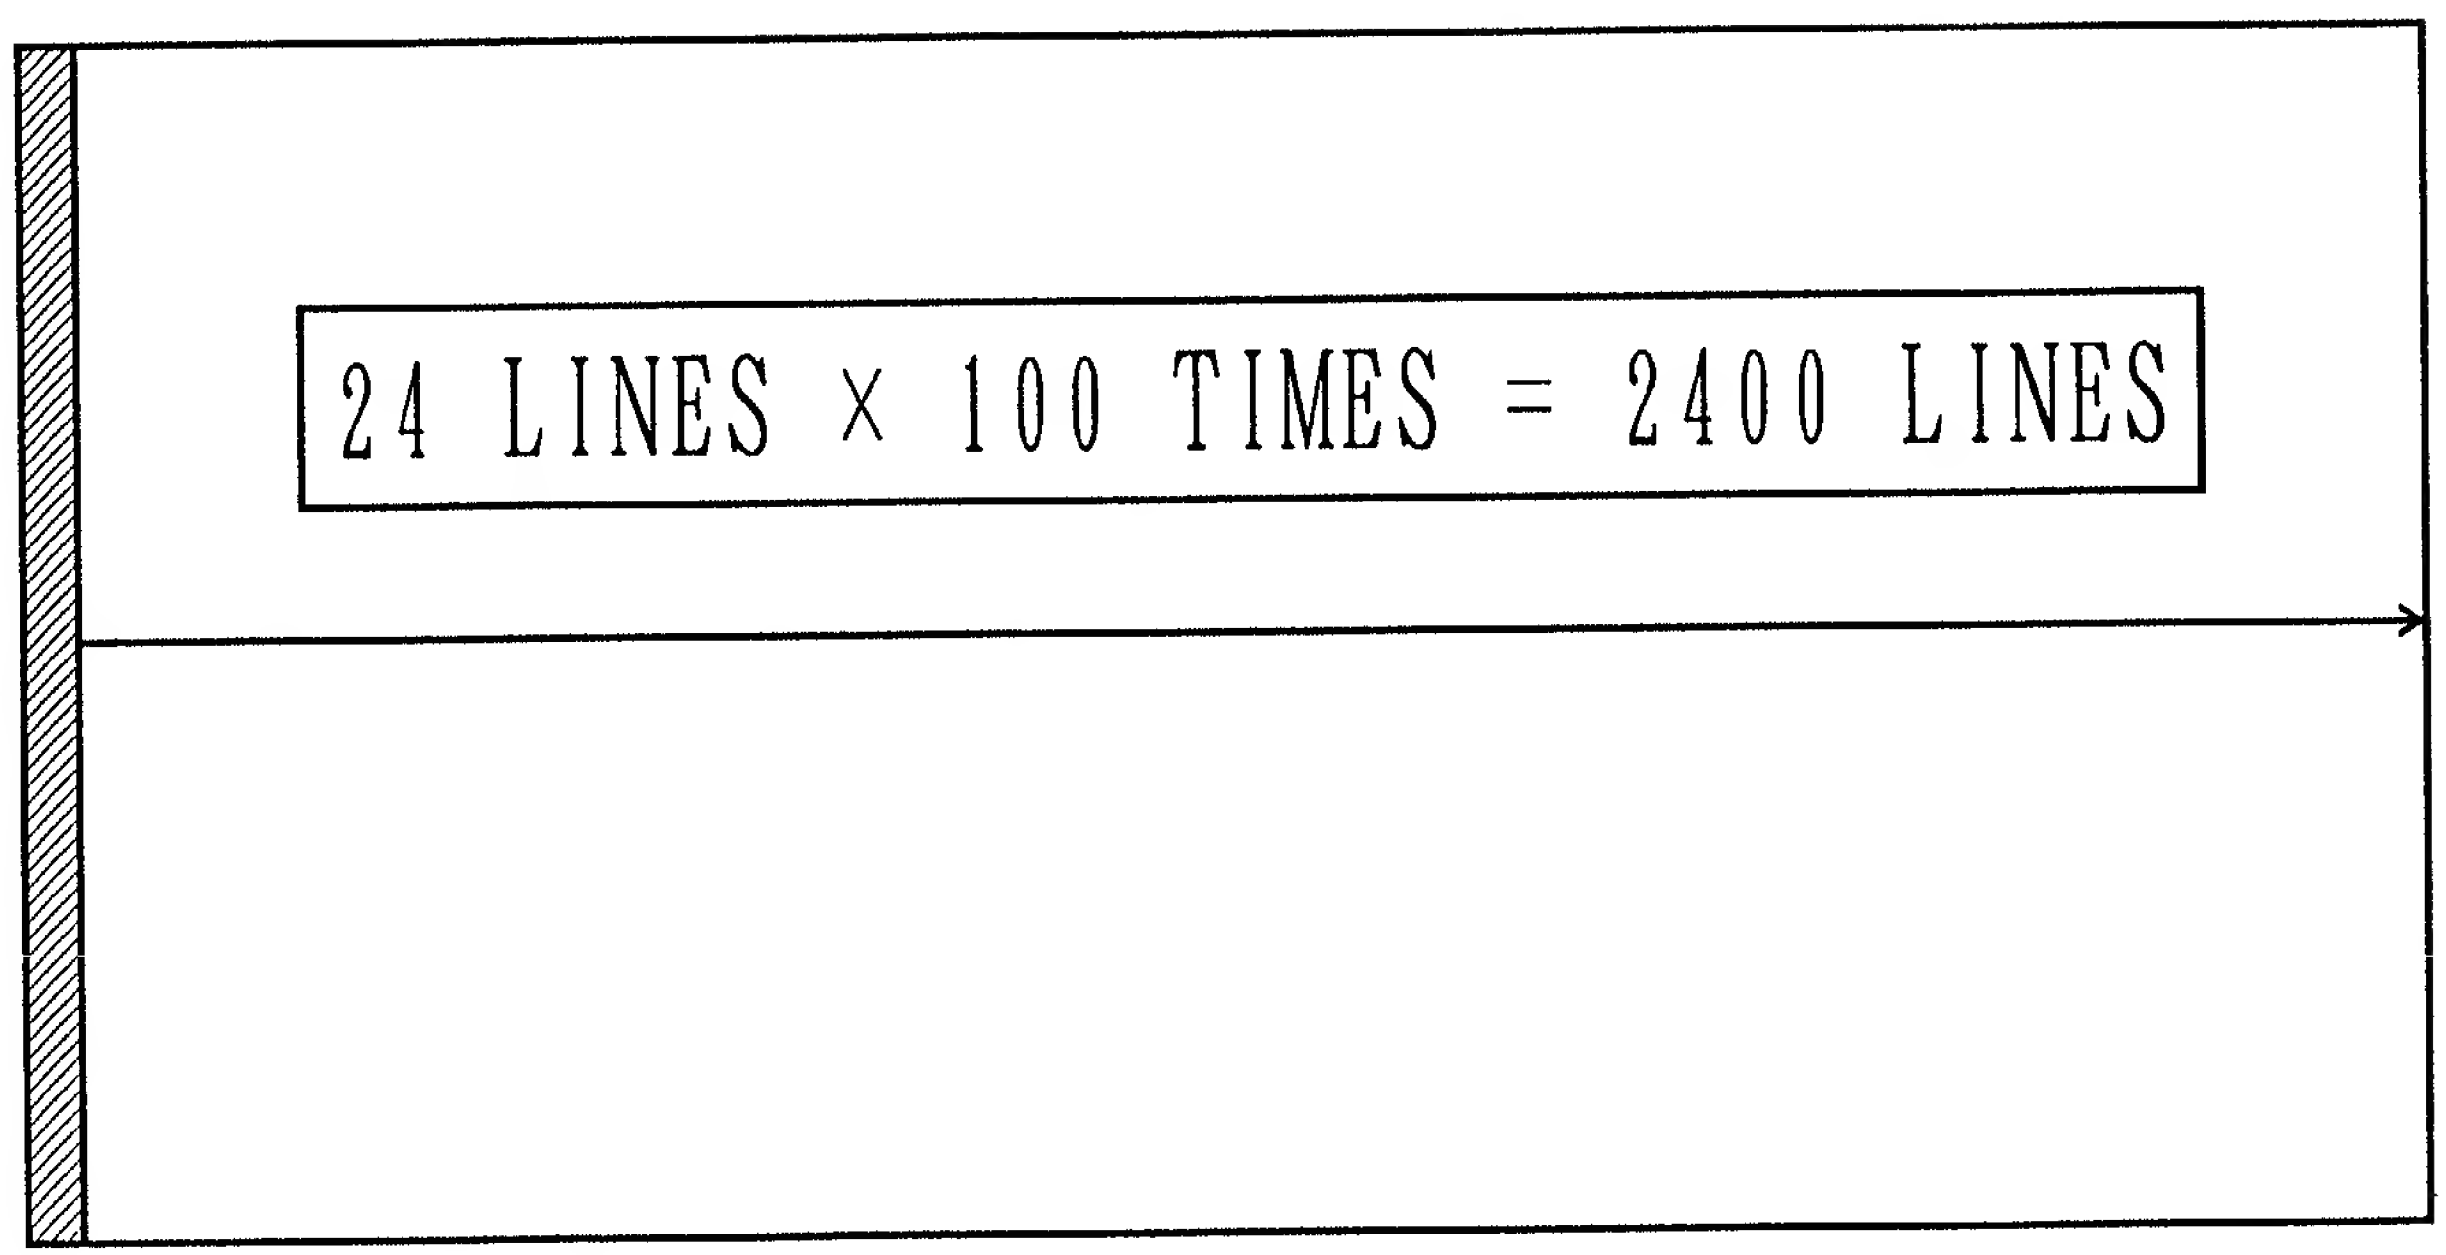

FIG. 3

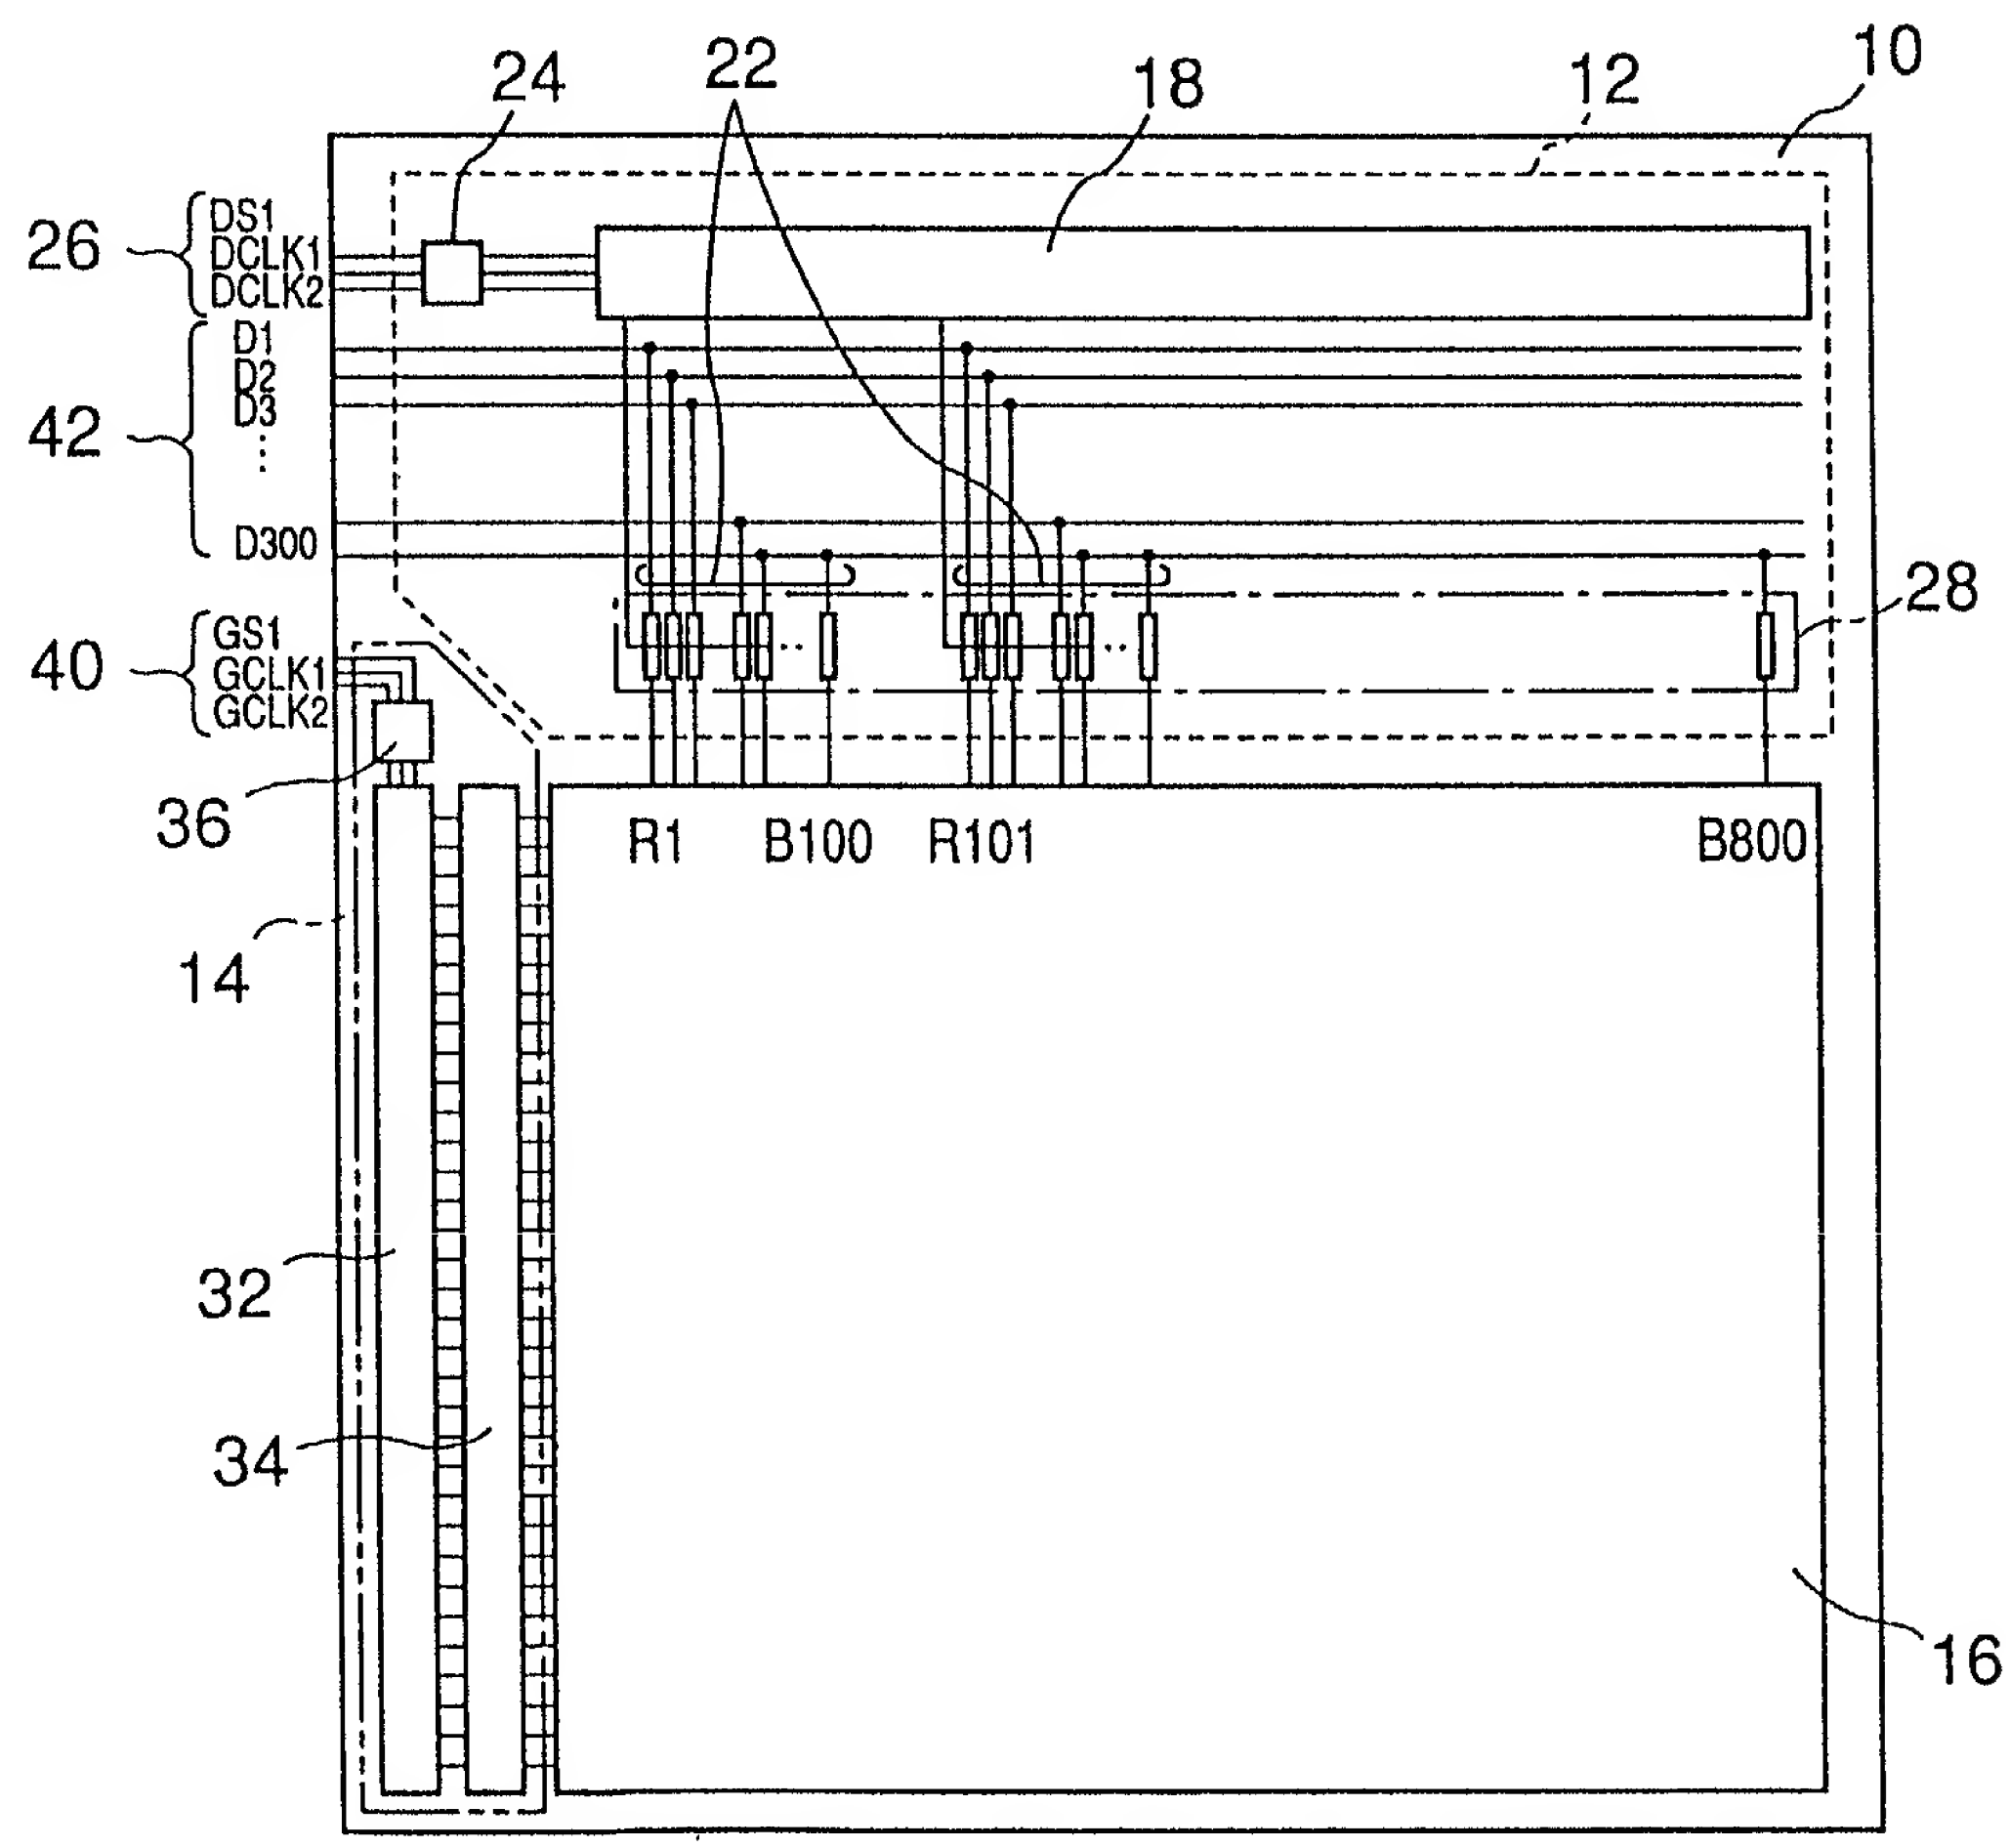

24
22
18
12
10
26
DS1
DCLK1
DCLK2
42
D1
D2
D3
D300
40
GS1
GCLK1
GCLK2
28
36
R1
B100
R101
B800
14
32
34
16

FIG. 4

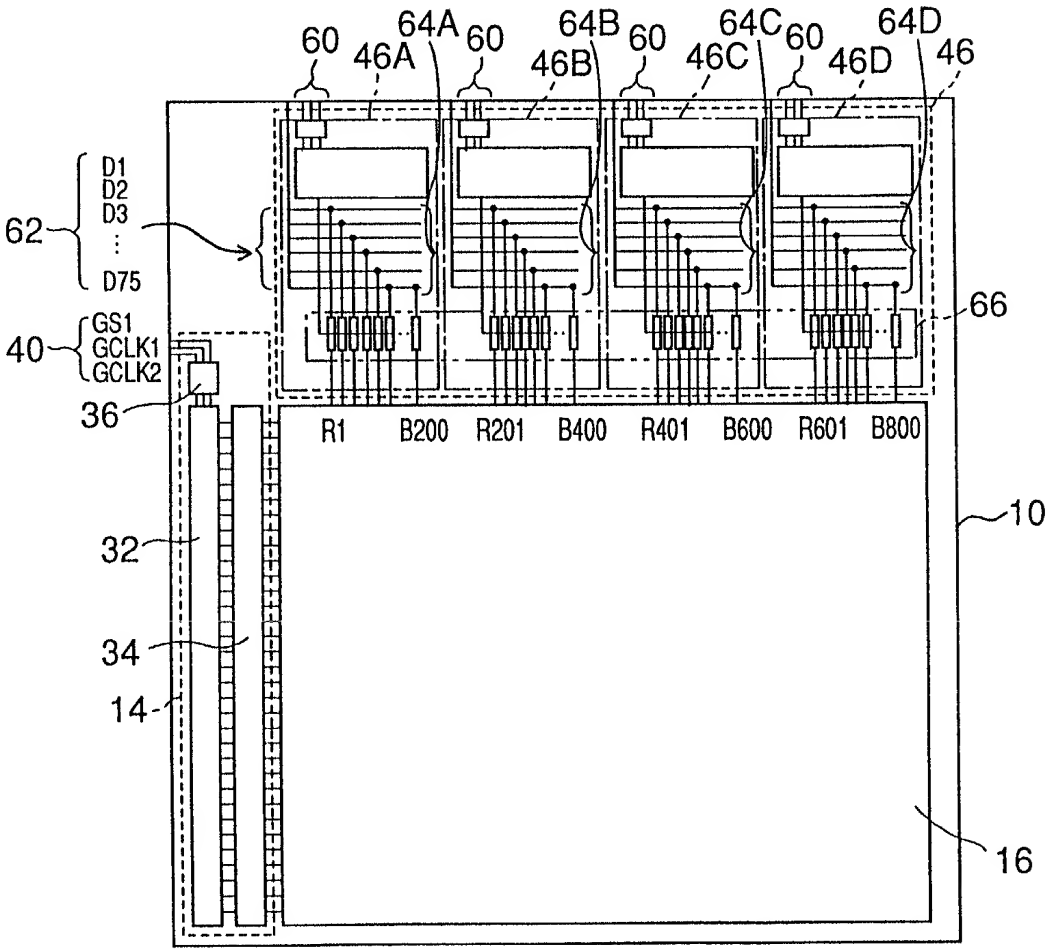
60
46A
64A
60
46B
64B
60
46C
64C
60
46D
64D
46
D1
D2
D3
D75
62
GS1
GCLK1
GCLK2
40
36
66
R1
B200
R201
B400
R401
B600
R601
B800
10
32
34
14
16

FIG. 5

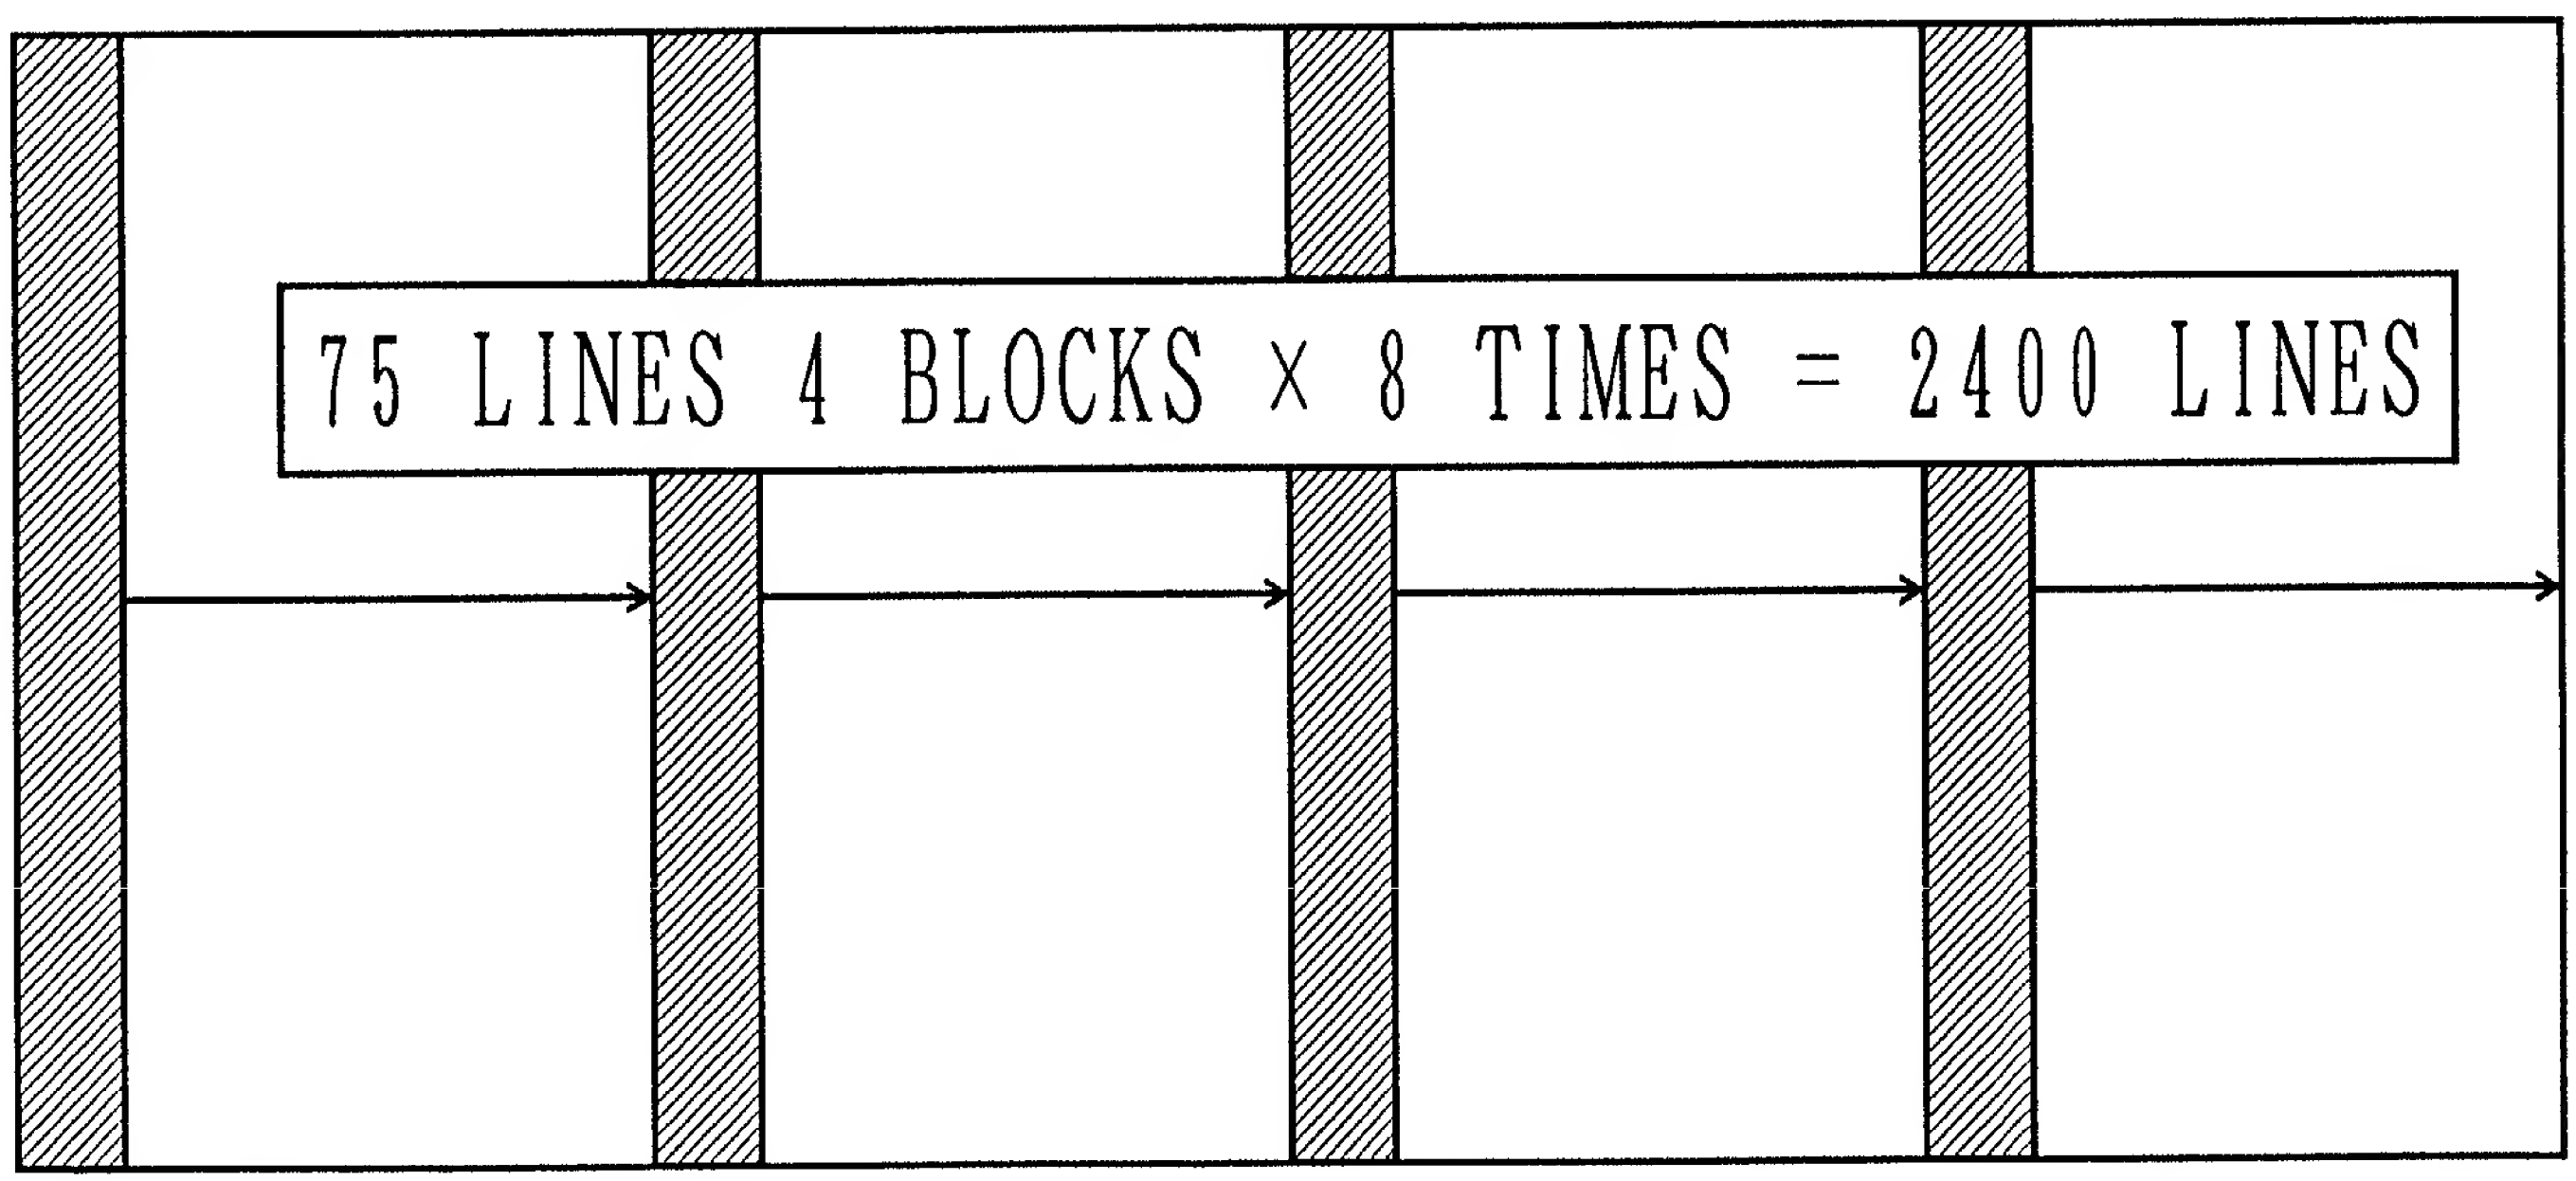

FIG. 6

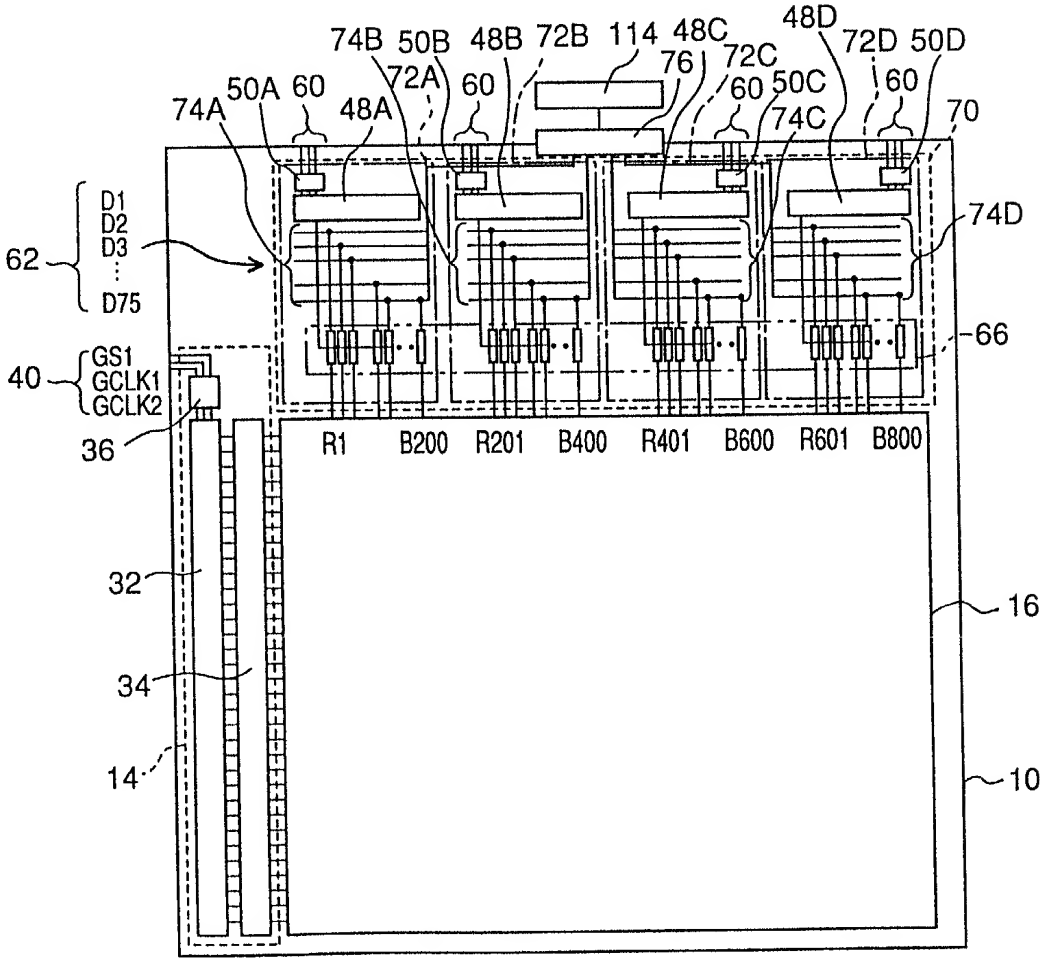
74B
50B
48B
72B
114
48C
48D
72D
50D
74A
50A
60
72A
60
76
72C
60
50C
60
74C
70
48A
D1
D2
D3
D75
62
74D
GS1
GCLK1
GCLK2
40
66
36
R1
B200
R201
B400
R401
B600
R601
B800
32
16
34
14
10

FIG. 7

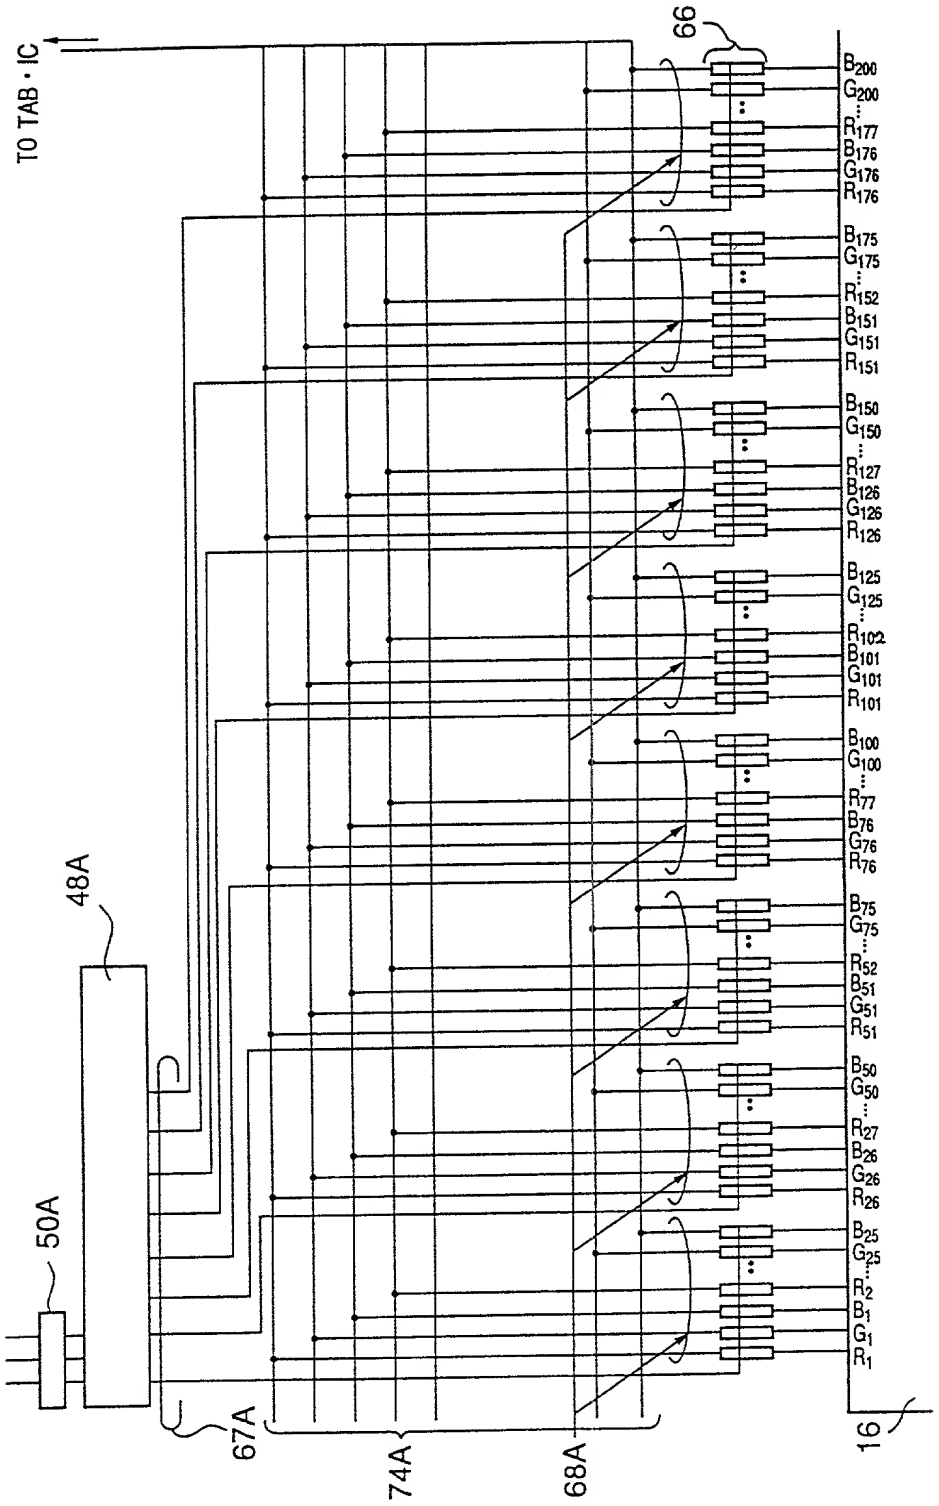
TO TAB · IC
66
48A
50A
67A
74A
68A
16
B200
G200
R177
B176
G176
R176
B175
G175
R152
B151
G151
R151
B150
G150
R127
B126
G126
R126
B125
G125
R102
B101
G101
R101
B100
G100
R77
B76
G76
R76
B75
G75
R52
B51
G51
R51
B50
G50
R27
B26
G26
R26
B25
G25
R2
B1
G1
R1

FIG. 8

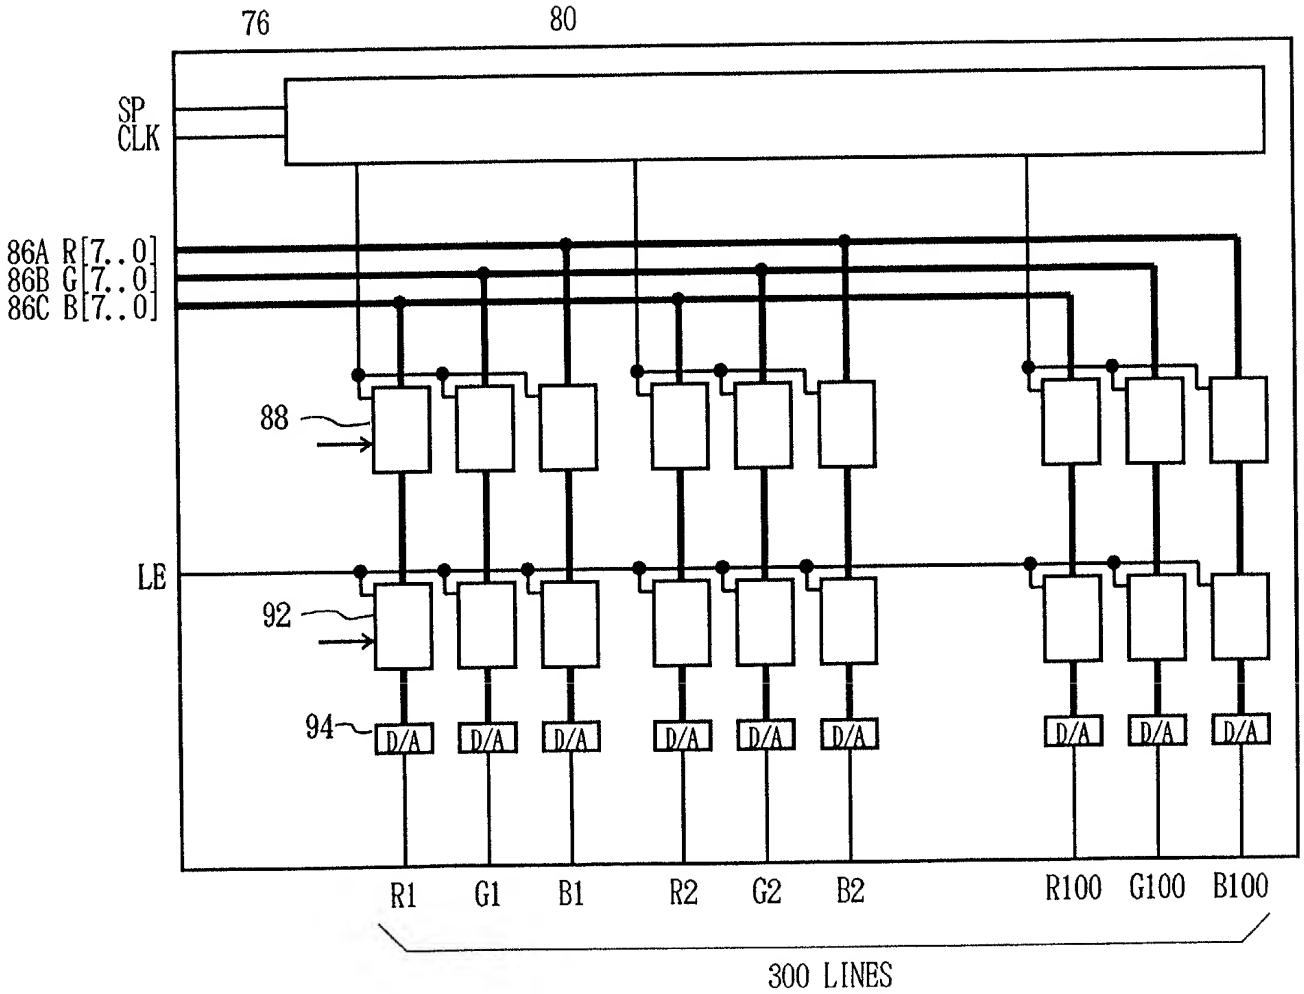
76
80
SP
CLK
86A R[7..0]
86B G[7..0]
86C B[7..0]
88
LE
92
94
D/A
R1
G1
B1
R2
G2
B2
R100
G100
B100
300 LINES

FIG. 9

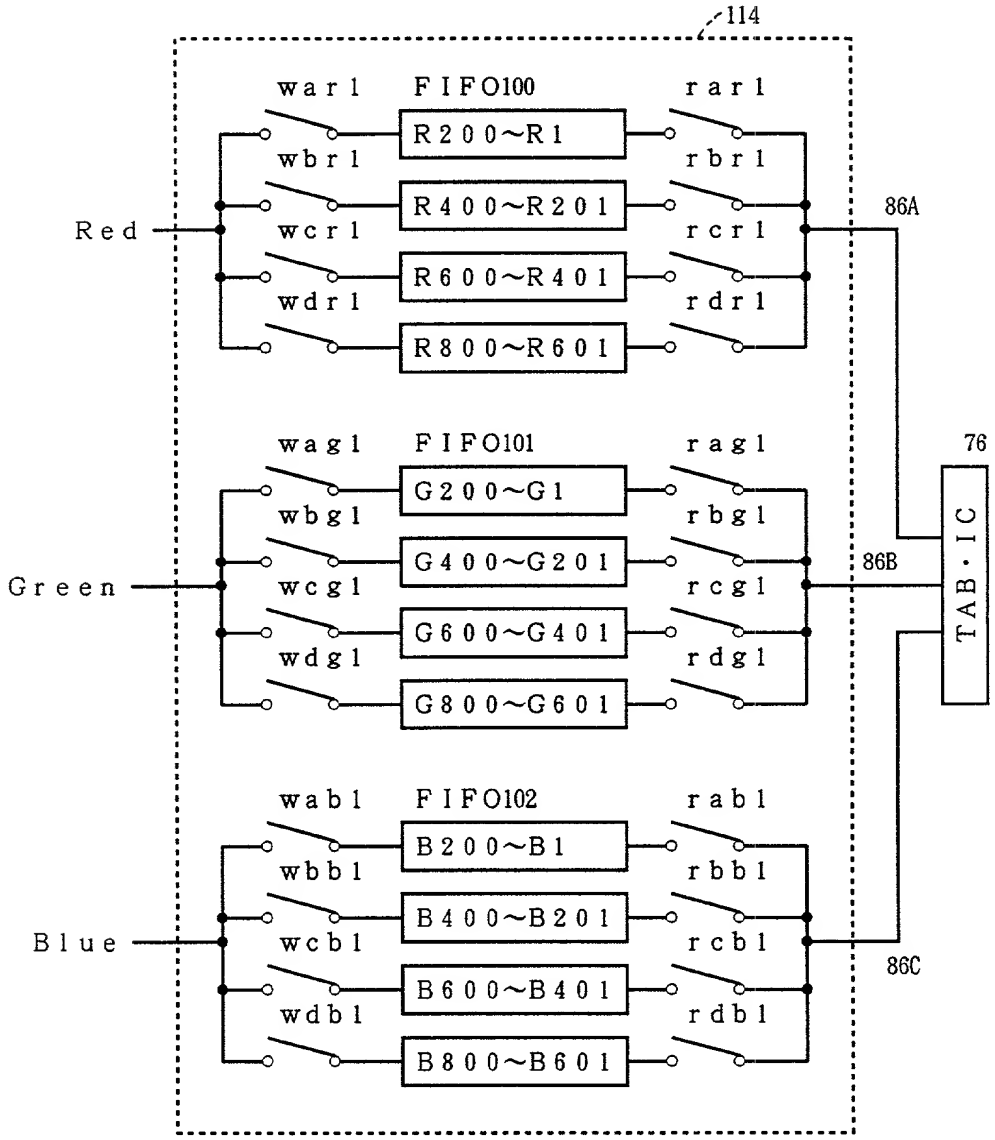
114
war1
FIFO100
rar1
R200~R1
wbr1
rbr1
R400~R201
Red
wcr1
rcr1
86A
R600~R401
wdr1
rdr1
R800~R601
wag1
FIFO101
rag1
76
G200~G1
wbg1
rbg1
G400~G201
Green
86B
wcg1
rcg1
TAB・IC
G600~G401
wdg1
rdg1
G800~G601
wab1
FIFO102
rab1
B200~B1
wbb1
rbb1
B400~B201
Blue
wcb1
rcb1
86C
B600~B401
wdb1
rdb1
B800~B601

FIG. 10

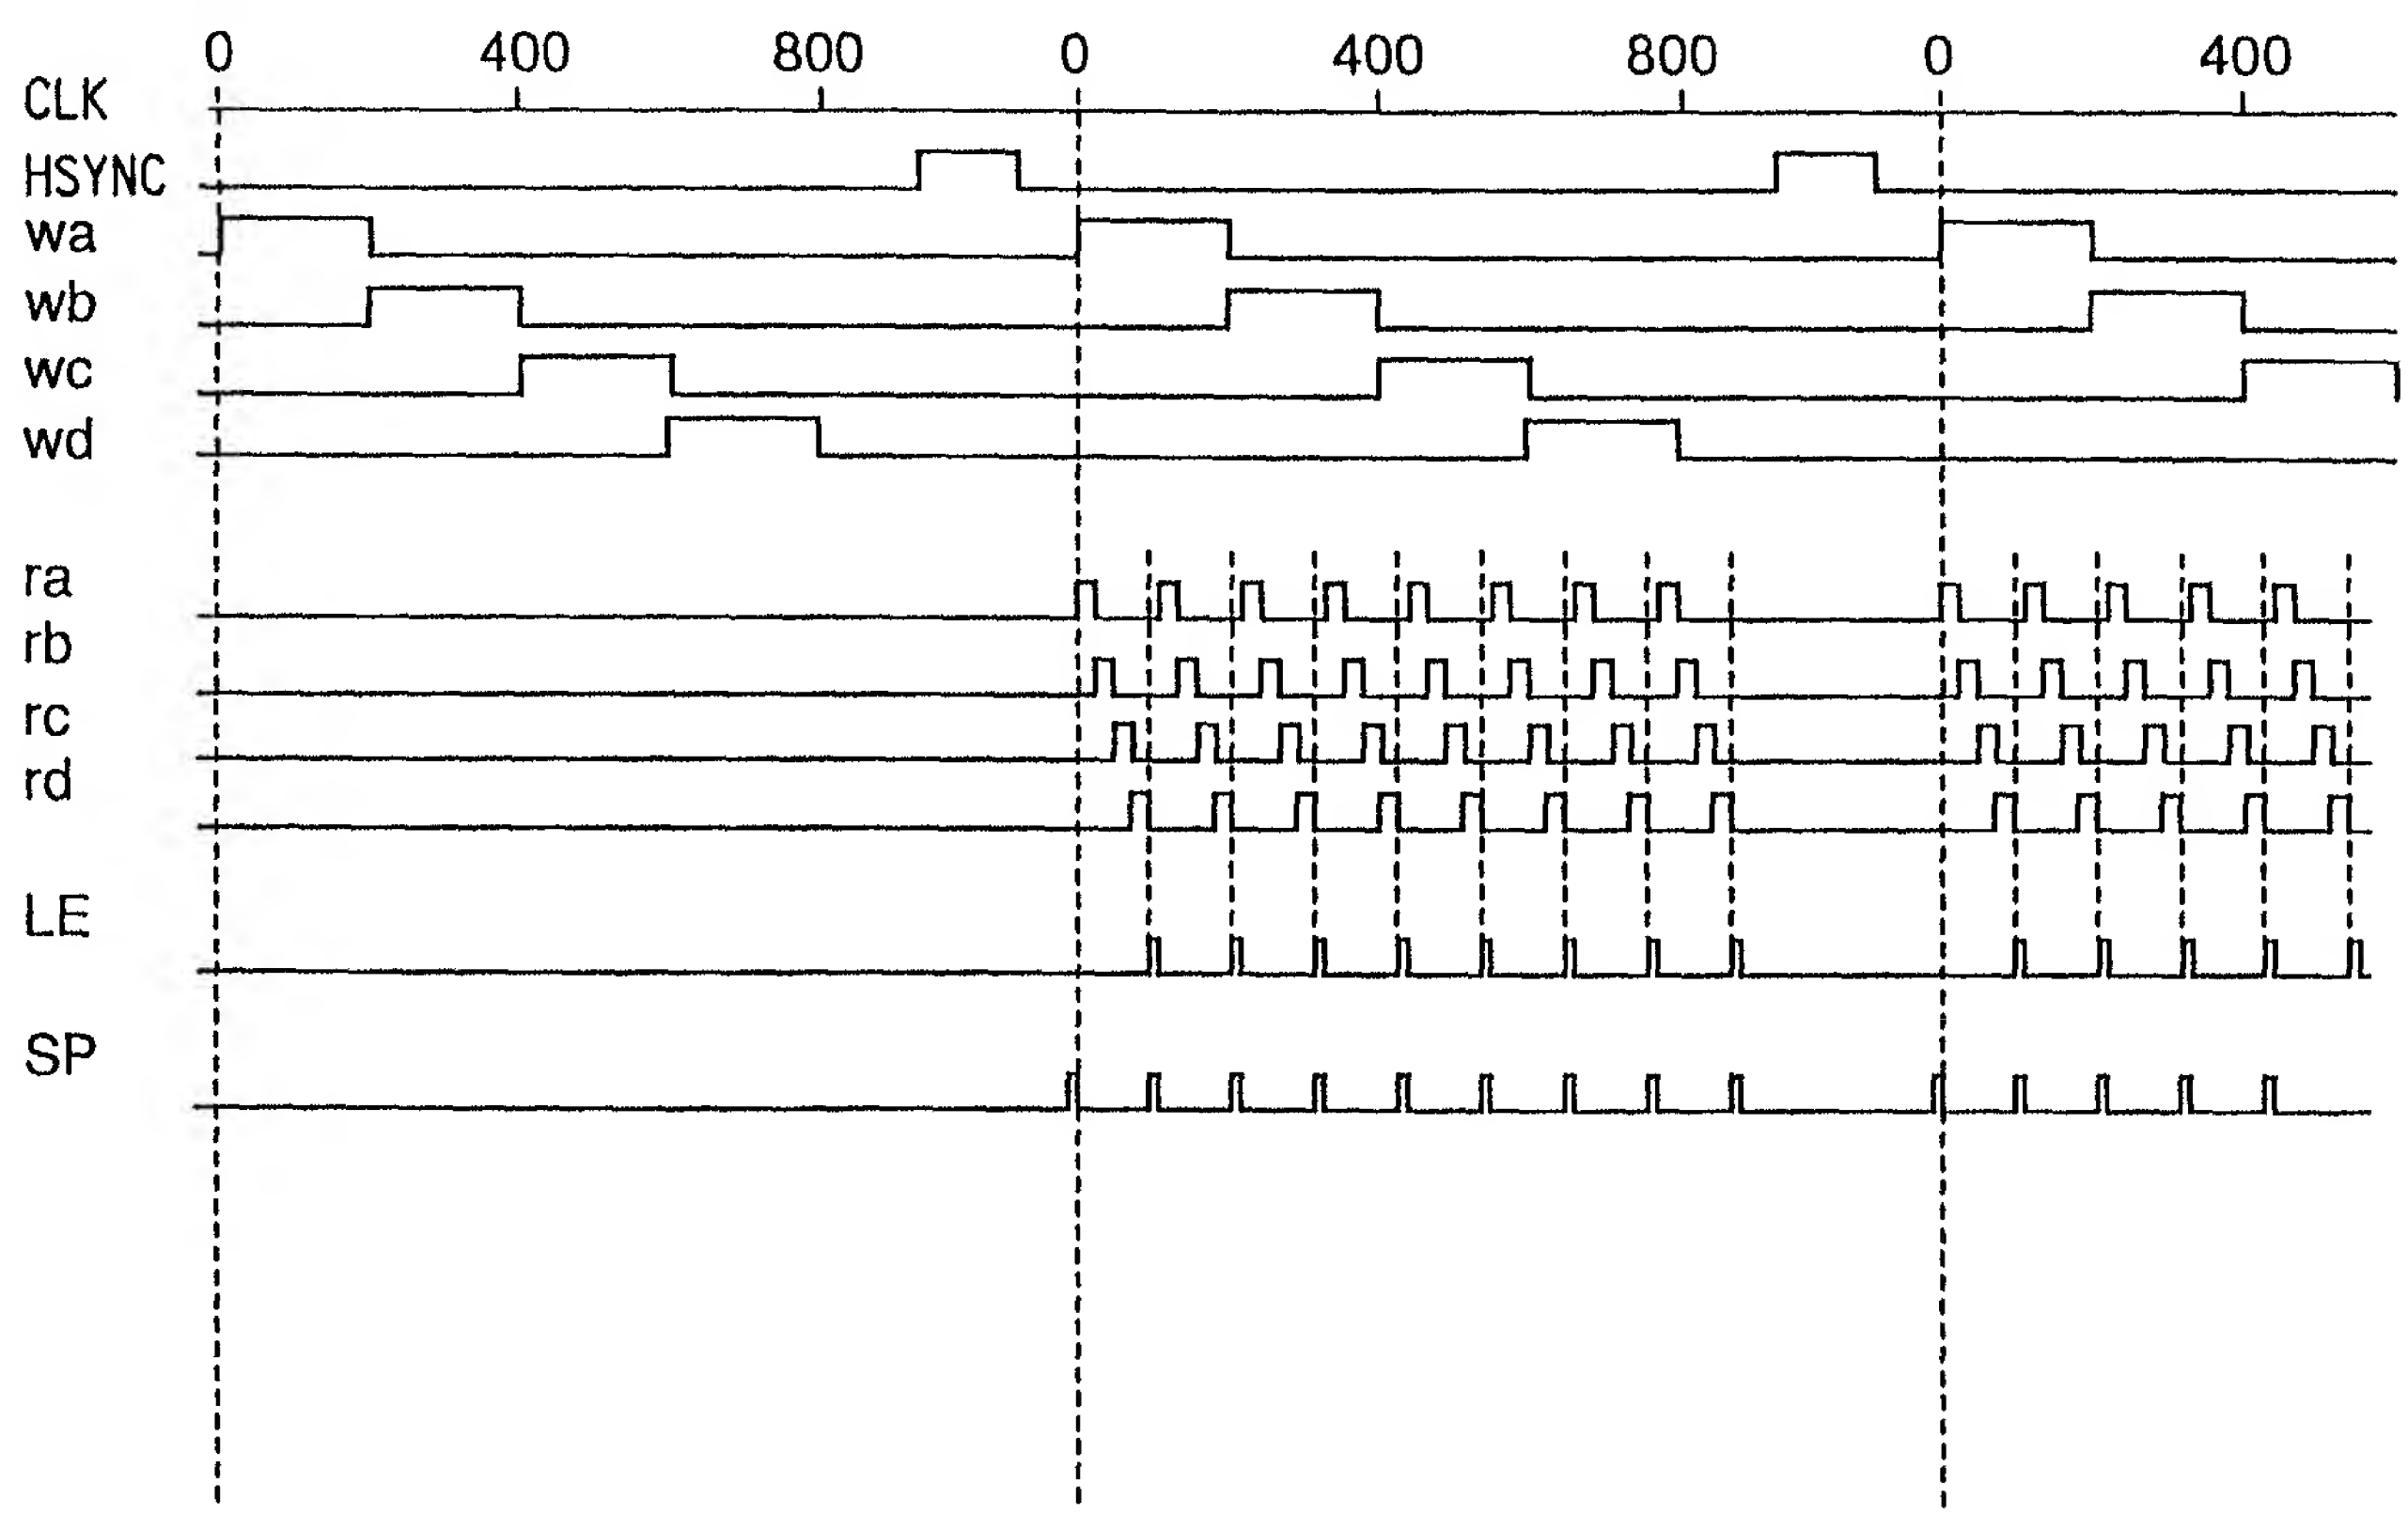

FIG. 11

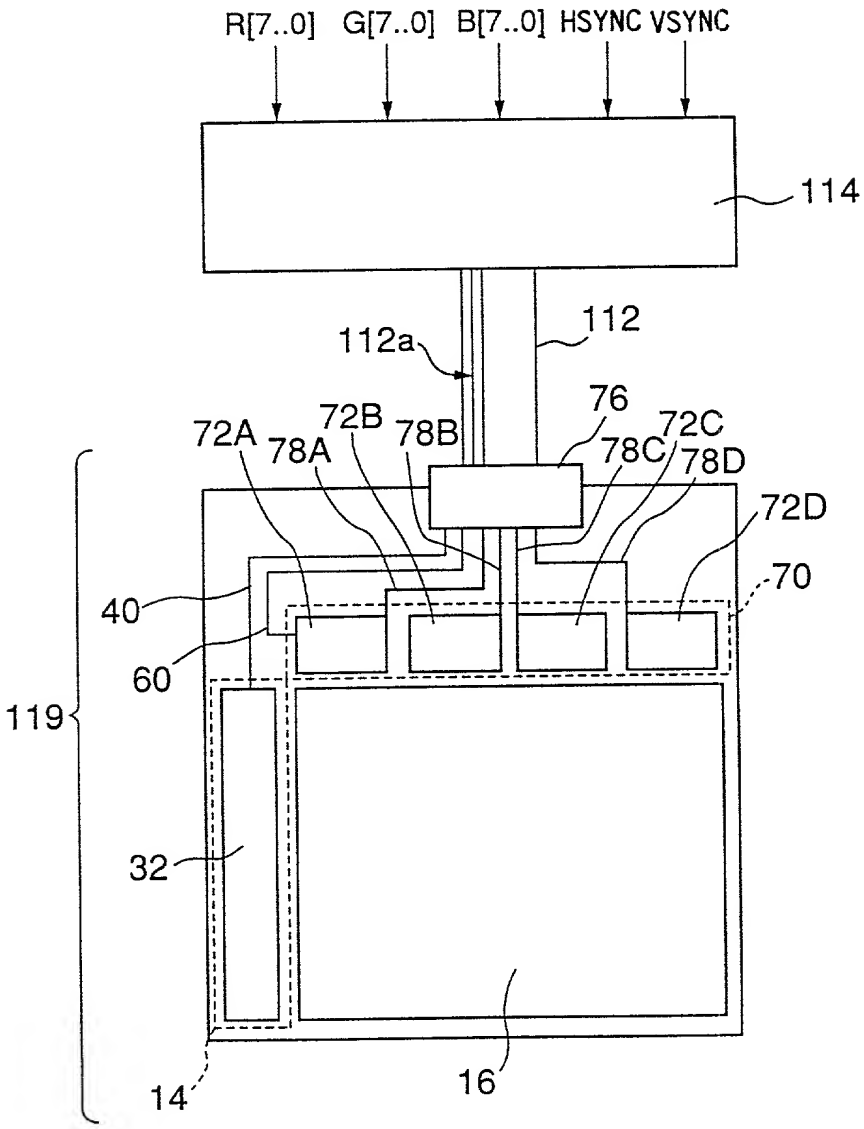
R[7..0]
G[7..0]
B[7..0]
HSYNC
VSYNC
114
112
112a
76
72A
78A
72B
78B
72C
78C
78D
72D
70
40
60
119
32
14
16

FIG. 12

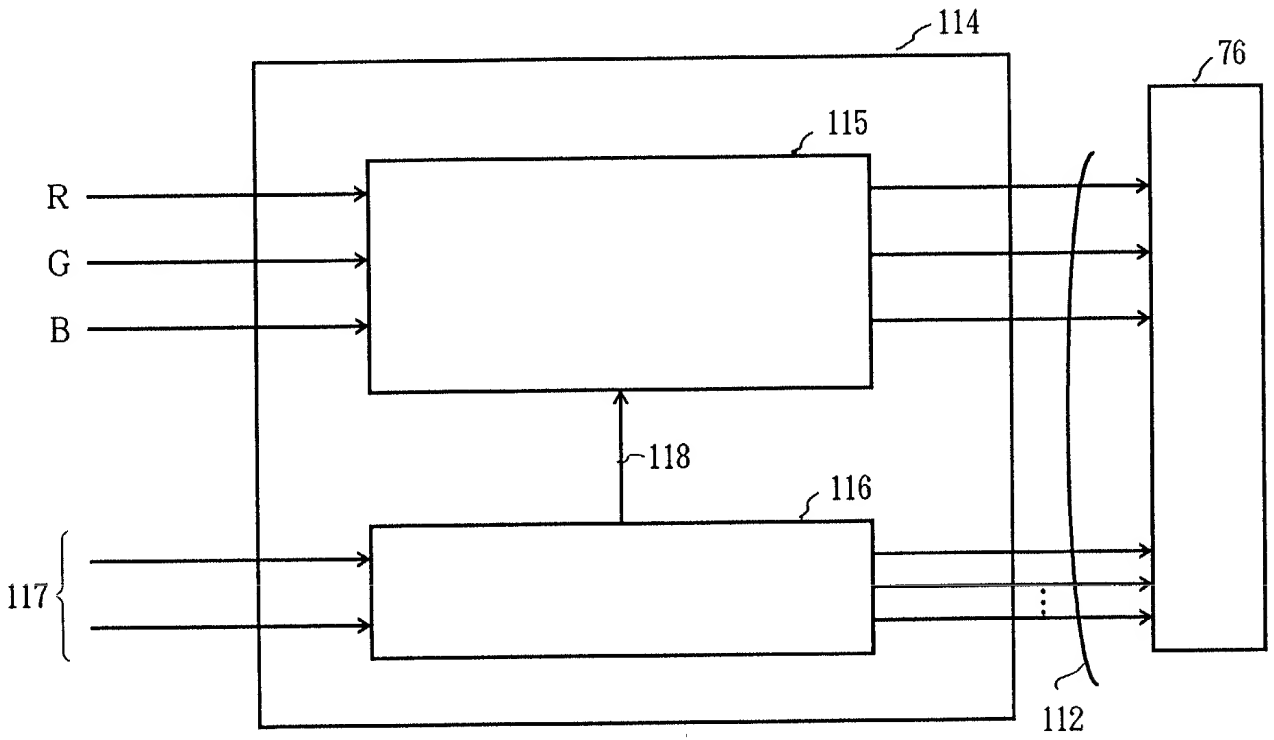

FIG. 13

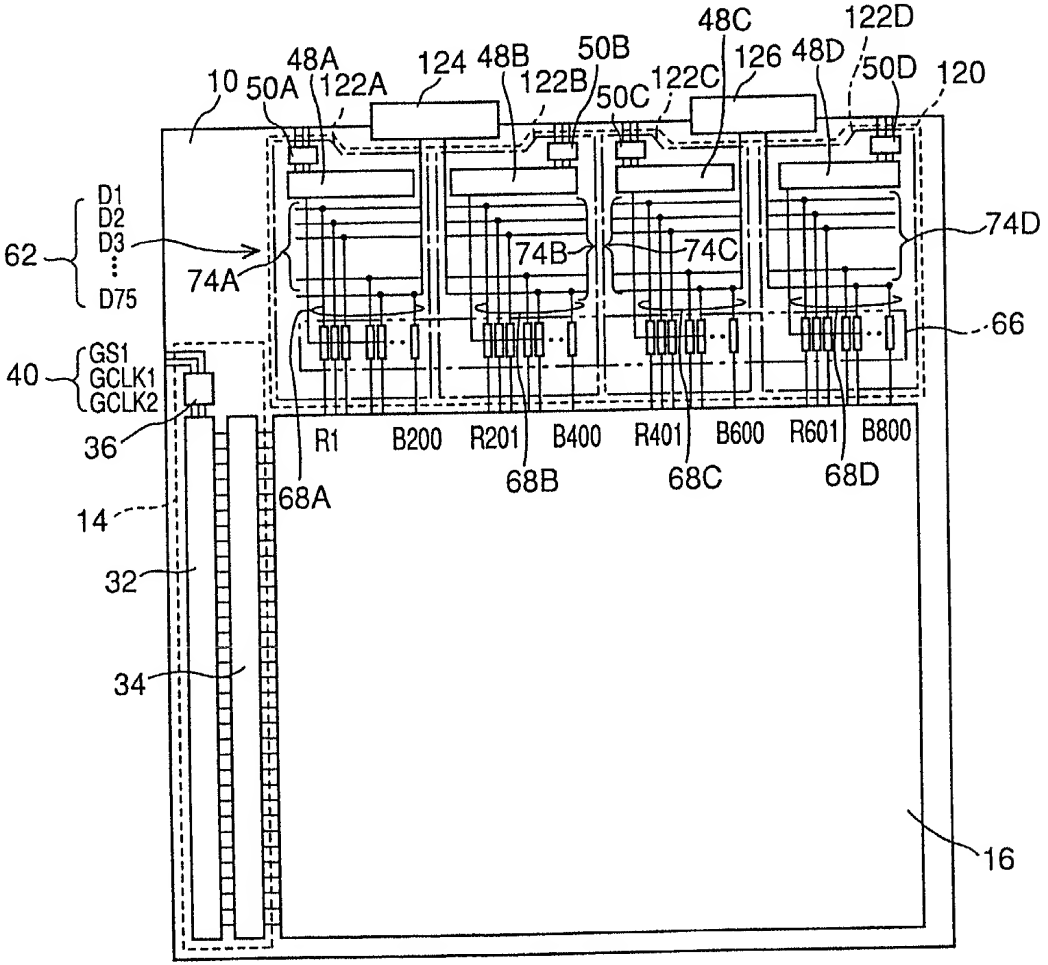
10
48A
50A
122A
124
48B
122B
50B
50C
122C
48C
126
48D
122D
50D
120
D1
D2
D3
D75
62
74A
74B
74C
74D
66
GS1
GCLK1
GCLK2
40
36
R1
B200
R201
B400
R401
B600
R601
B800
68A
68B
68C
68D
14
32
34
16

FIG. 14

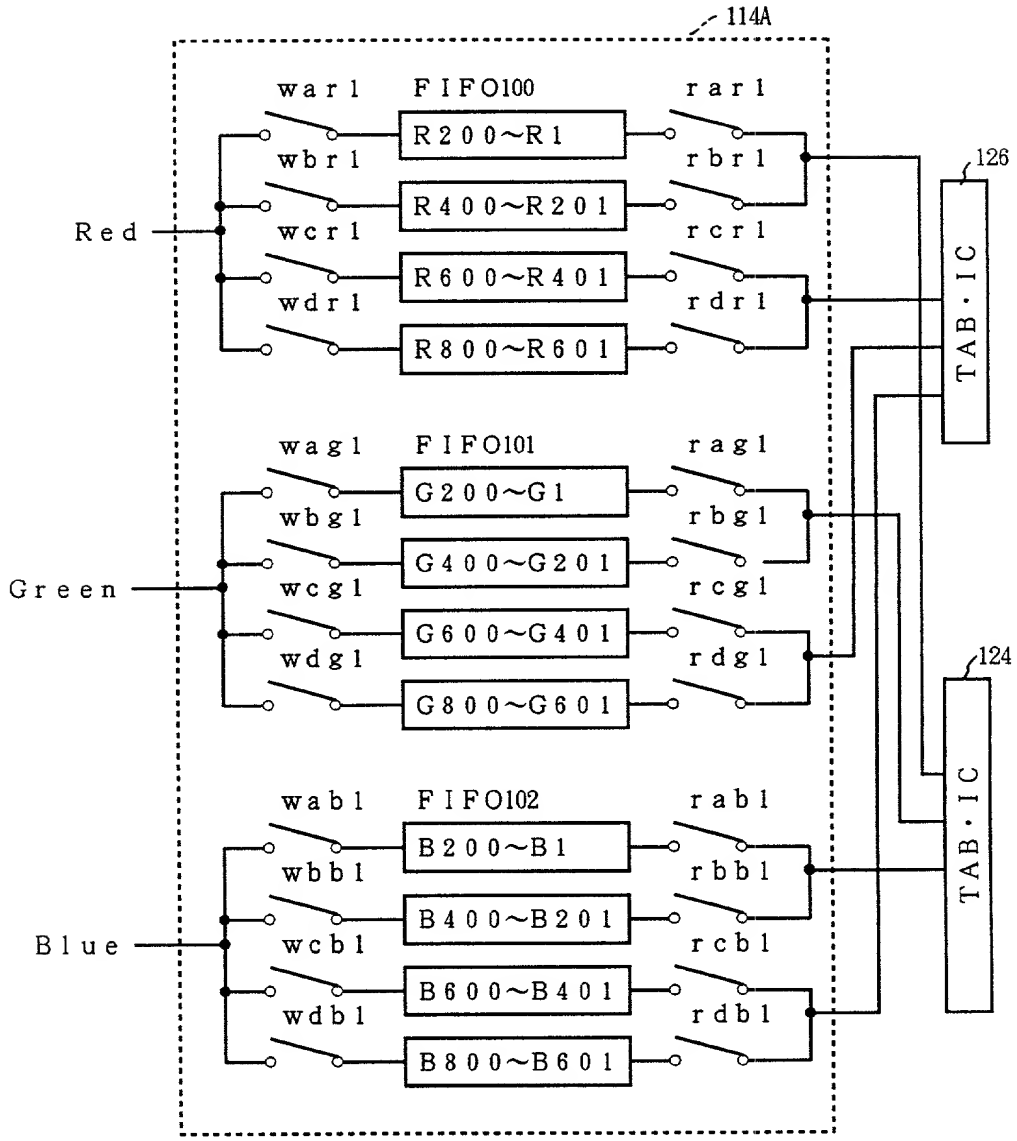
114A
war1
FIFO100
rar1
R200~R1
wbr1
rbr1
R400~R201
Red
wcr1
rcr1
R600~R401
wdr1
rdr1
R800~R601
126
TAB・IC
wag1
FIFO101
rag1
G200~G1
wbg1
rbg1
G400~G201
Green
wcg1
rcg1
G600~G401
wdg1
rdg1
G800~G601
124
TAB・IC
wab1
FIFO102
rab1
B200~B1
wbb1
rbb1
B400~B201
Blue
wcb1
rcb1
B600~B401
wdb1
rdb1
B800~B601

FIG. 15

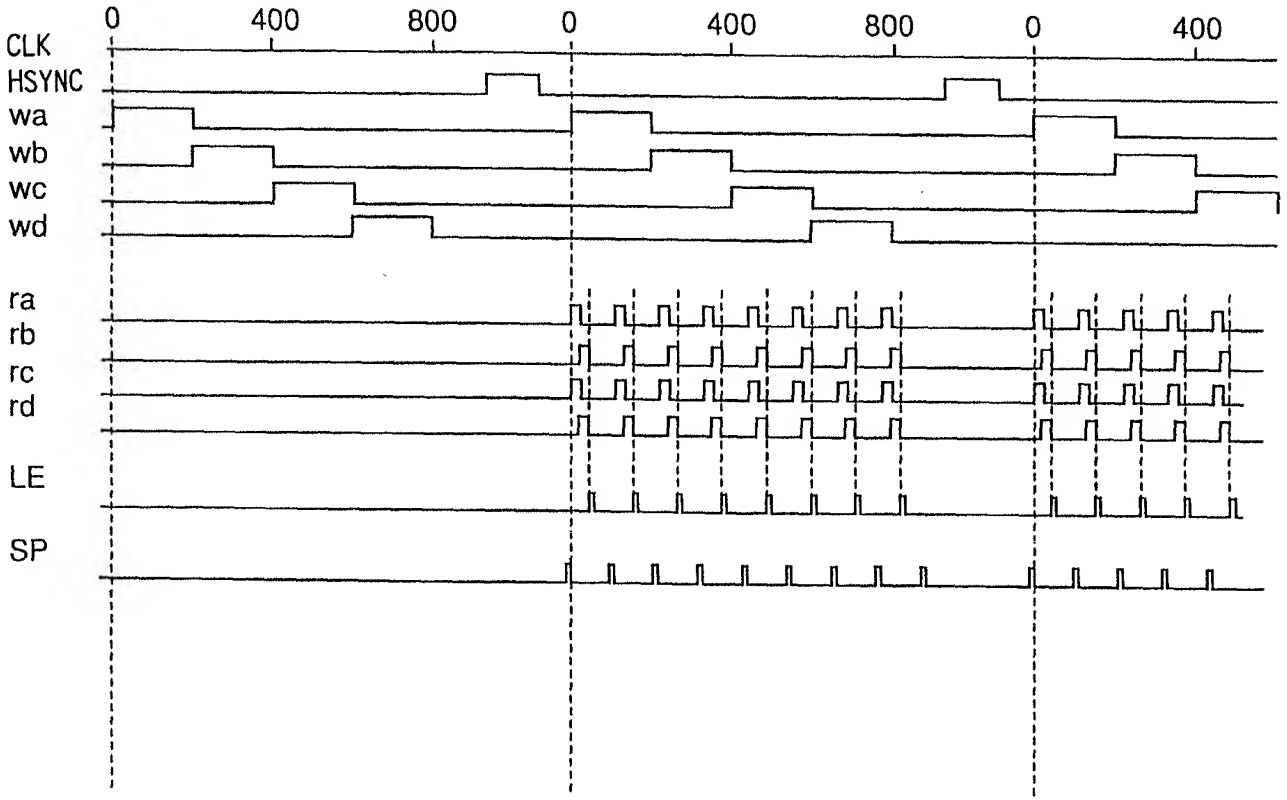

FIG. 16

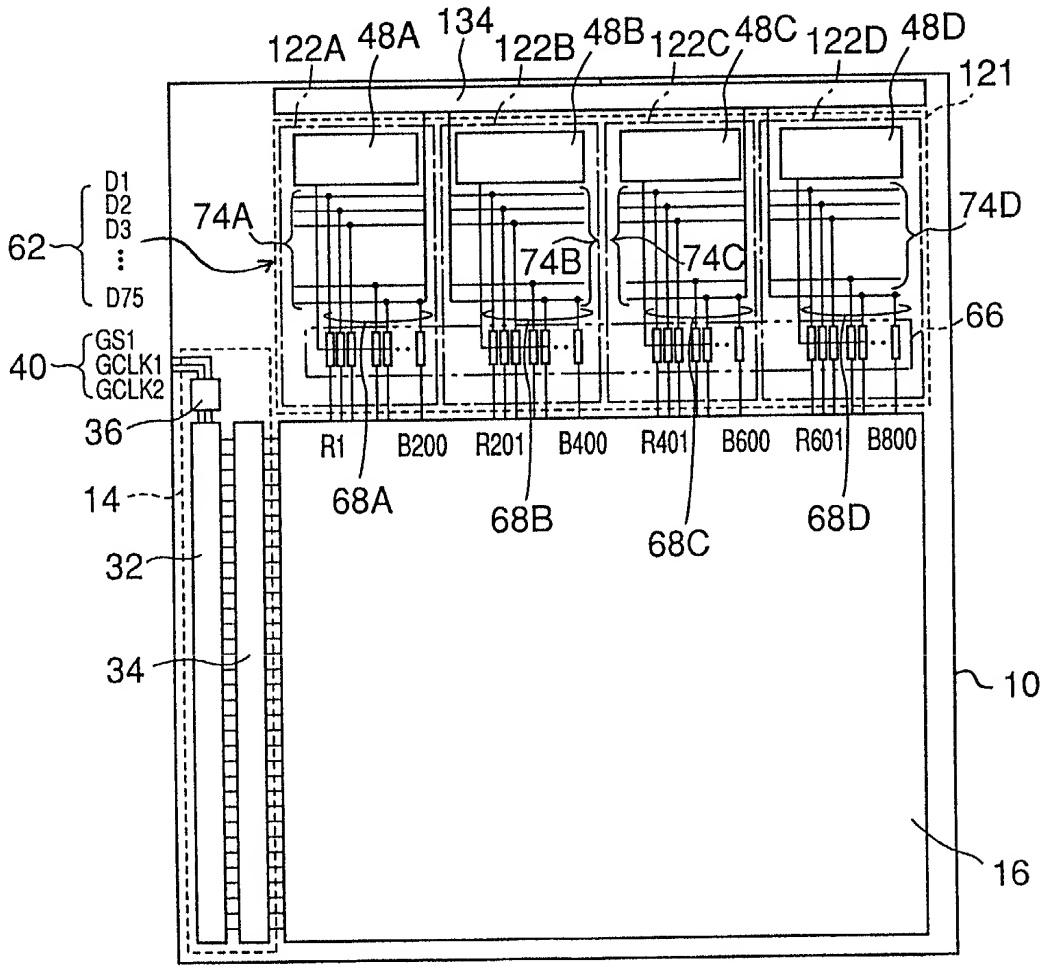
122A
48A
134
122B
48B
122C
48C
122D
48D
121
D1
D2
D3
D75
62
74A
74B
74C
74D
66
GS1
GCLK1
GCLK2
40
36
R1
B200
R201
B400
R401
B600
R601
B800
68A
68B
68C
68D
14
32
34
10
16

FIG. 17

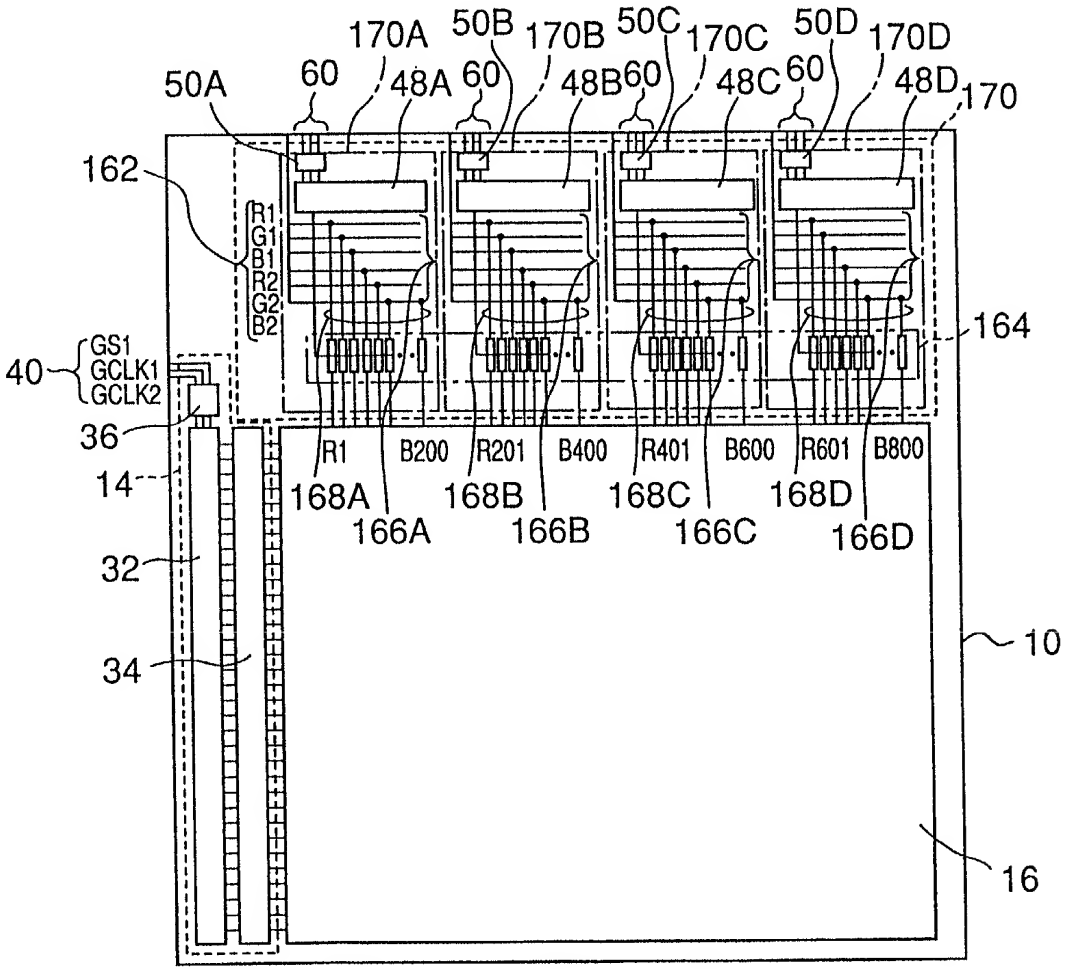

FIG. 18

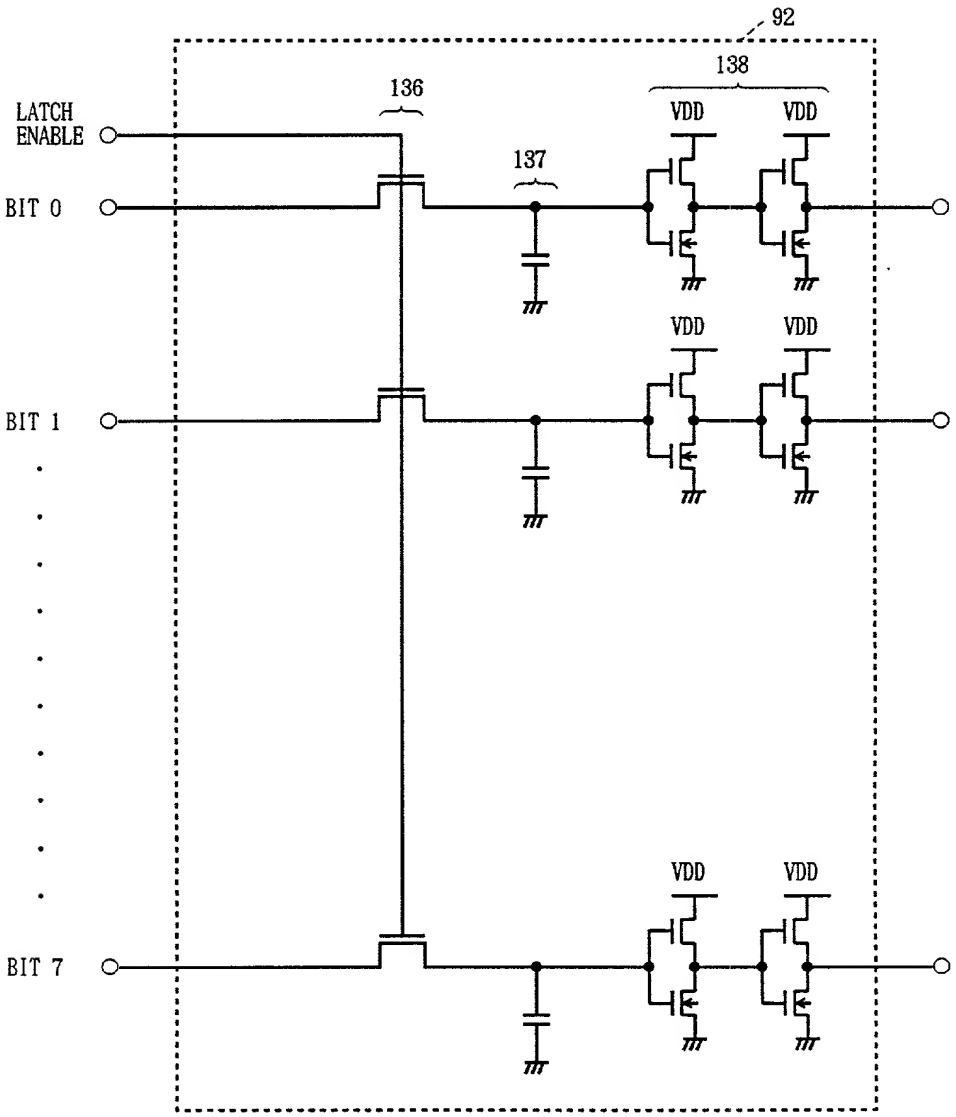
92
136
138
LATCH ENABLE
137
VDD
VDD
BIT 0
VDD
VDD
BIT 1
VDD
VDD
BIT 7

FIG. 19

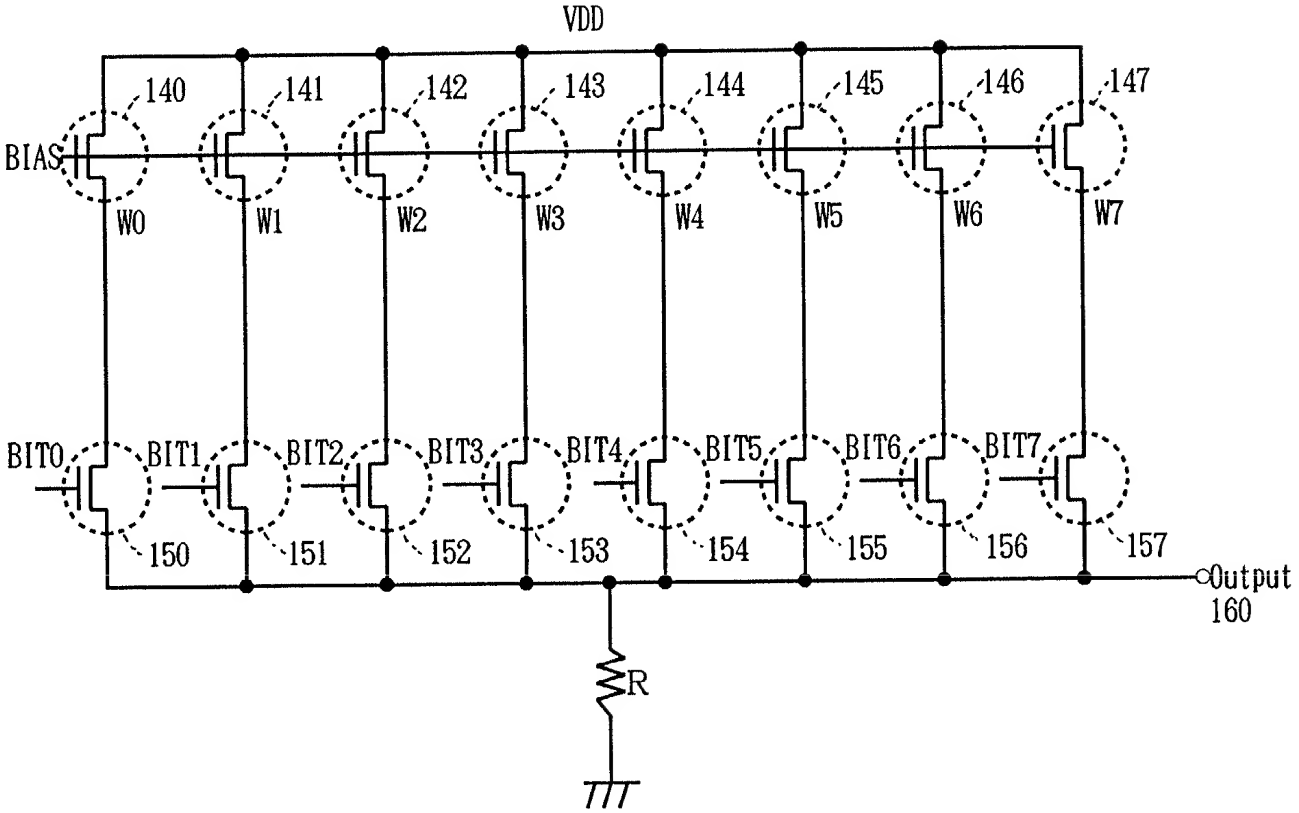

FIG. 20

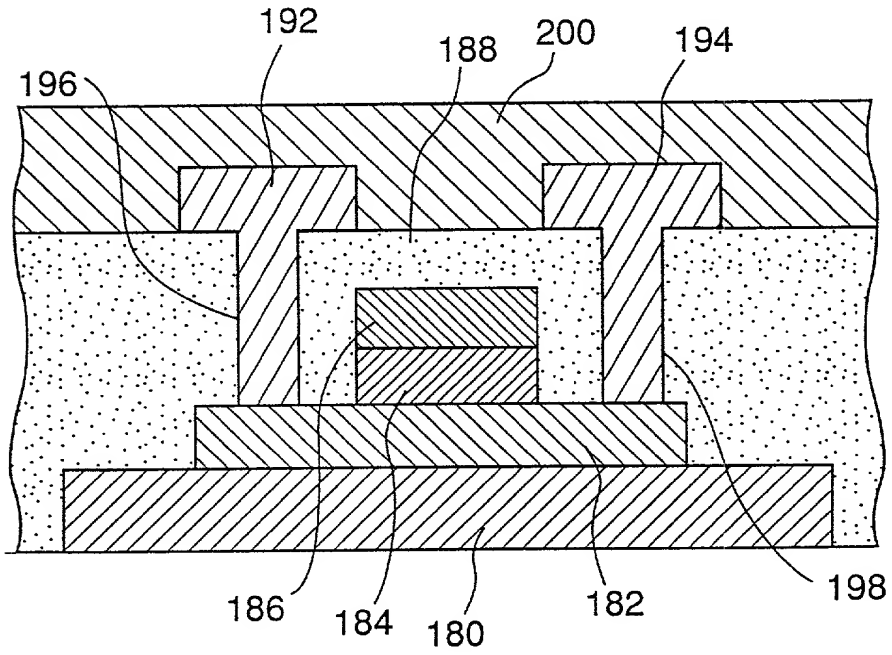

Declaration and Power of Attorney For Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

_____

_____

_____

その明細書を
（該当する方に印を付す）

☐ ここに添付する。

☐ _____ 日に出願番号

第 0/_____ 号として提出し、

_____ 日に補正した。
（該当する場合）

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦規則法典第37巻第1章第56条（a）項に従い、本願の審査に所要の情報を開示すべき義務を有することを認める。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LIQUID CRYSTAL DISPLAY DEVICE

_____

_____

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as

Application Serial No. 0/_____

and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Form PTO-FB-265 (8-83)

Patent and Trademark Office-U.S. DEPARTMENT OF COMMERCE

Japanese Language Declaration

私は、合衆国法典第35部第119 条にもとづく下記の外国特許出願または発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願または発明者証出願を以下に明記する：

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior foreign applications
先の外国出願

(Number) (番 号)	(Country) (国 名)	(Day/Month/Year Filed) (出願の年月日)	Priority claimed 優先権の主張 Yes あり	No なし
Pat. Appln. No.10-137247	Japan	19/May/1998	[X]	[ ]
			[ ]	[ ]
			[ ]	[ ]

私は、合衆国法典第35部第120 条にもとづく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112 条第1項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日またはＰＣＴ国際出願日の間に公表された連邦規則法典第37部第1章第56条（a）項に記載の所要の情報を開示すべき義務を有することを認める：

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (出願番号)	(Filing Date) (出願日)	(現 況) (特許済み、係属中、放棄済み)	(Status) (patented, pending, abandoned)
0			
0			

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損うことがあることを認識して、以上の陳述を行ったことを宣言する．

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Form PTO-FB-265 (8-83)
Patent and Trademark Office-U.S. DEPARTMENT OF COMMERCE

Japanese Language Declaration

委任状：私は、下記発明者として、以下の代理人をここに選任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。
（代理人氏名および登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*list name and registration number*)

Attorney	Reg. No.
Patrick G. Burns	29,367
Roger D. Greer	26,174
Lawrence J. Crain	31,497
Christopher J. Reckamp	34,414
Steven P. Fallon	35,132

書類の送付先：

Send Correspondence to:
Patrick G. Burns
GREER, BURNS & CRAIN, LTD.
Suite 8660 - Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606

直通電話連絡先：（名称および電話番号）

Direct Telephone Calls to: (*name and telephone number*)
Patrick G. Burns
(312) 993-0080

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor Akira Yamamoto
同発明者の署名　日付	Inventor's signature　Akira Yamamoto　Date March 23, 1999
住所	Residence Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku,
	Kawasaki-shi, Kanagawa, 211-8588 Japan
第２の共同発明者の氏名（該当する場合）	Full name of second joint inventor, if any Kazuhiro Takahara
同第２発明者の署名　日付	Second inventor's signature　Kazuhiro Takahara　Date March 23, 1999
住所	Residence Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku,
	Kawasaki-shi, Kanagawa, 211-8588 Japan

…（第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。）

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration

第3の共同発明者の氏名（該当する場合）	Full name of 3rd joint inventor, if any Hiroshi Murakami
同第3発明者の署名　日付	3rd Inventor's signature　Date Hiroshi Murakami　March 23, 1999
住所	Residence Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address　c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku,
	Kawasaki-shi, Kanagawa, 211-8588 Japan
第4の共同発明者の氏名（該当する場合）	Full name of 4th joint inventor, if any
同第4発明者の署名　日付	4th Inventor's signature　Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address
第5の共同発明者の氏名（該当する場合）	Full name of 5th joint inventor, if any
同第5発明者の署名　日付	5th Inventor's signature　Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address
第6の共同発明者の氏名（該当する場合）	Full name of 6th joint inventor, if any
同第6発明者の署名　日付	6th Inventor's signature　Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

（第7またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。）

(Supply similar information and signature for 7th and subsequent joint inventors.)